

OFFICE DATE RECEIVED: _____

VIII. PRIOR APPROVALS CHECKLIST (office use only)	LOCAL APPROVAL		COUNTY APPROVAL		REGIONAL APPROVAL		STATE APPROVAL		COMMENTS
	Prelimin. Initial	Final Date	Prelimin. Initial	Final Date	Prelimin. Initial	Final Date	Prelimin. Initial	Final Date	
☐ Zoning Officer			X		X		X		
☐ Planning Board			X		X		X		
☐ Zoning Board			X		X		X		
☐ Sewer Authority			X		X		X		
☐ Water Authority			X		X		X		
☐ Fire Department			X		X		X		
☐ Police Department			X		X		X		
☐ Health Department			X		X		X		
☐ Soil Conservation			X		X		X		
☐ N.J. Dept. of Community Affairs			X		X		X		
☐ N.J. Department of Transportation			X		X		X		
☐ N.J. Dept. of Environmental Protection			X		X		X		
☐ Utility Dig No.			X		X		X		
☐			X		X		X		
☐			X		X		X		

IX. SUBCODES AND SPECIAL REGULATIONS APPLICABLE (office use only—optional)	
Name of Code & Edition	Name of Code & Edition
Building _____	Energy _____
Electrical _____	Barrier Free _____
Plumbing _____	Flood Hazard _____
Fire Protection _____	As Built Elevation Cert. _____
Mechanical _____	Other _____

X. CERTIFICATES ISSUED (office use only)	DATE ISSUED	DATE EXPIRED	DATE REISSUED	DATE EXPIRED
☐ Temporary Certificate of Occupancy	No. _____	_____	_____	_____
☐ Temporary Certificate of Compliance	No. _____	_____	_____	_____
☐ Continued Certificate of Occupancy	No. _____	_____	_____	_____
☐ Certificate of Compliance	No. _____	_____	_____	_____
☐ Certificate of Occupancy	No. _____	_____	_____	_____
☐ Certificate of Approval	No. _____	_____	_____	_____

CERTIFICATION IN LIEU OF OATH

I. OWNER SECTION (to be completed if the applicant is the owner in fee)

I hereby certify that I am the owner in fee of the property listed on Page 1.

Mark the following applicable boxes:

A. () I further certify that a new home (private residence) will be constructed on this property for my own use and occupancy. This dwelling is to be occupied by myself and is not to be used for any purpose other than single family residential use. I attest that all construction, plumbing, or electrical work will be done, in whole or in part, by me or by subcontractors under my supervision, in accordance with all applicable laws; and, I further acknowledge that said new home is not covered under the New Home Warranty and Builders Registration Act (N.J.S.A. 46:3B-1 et seq.) and that such fact shall be disclosed to any person purchasing this property within ten years of the date of issuance of a certificate of occupancy.

I UNDERSTAND THAT IN MARKING BOX A, I ACKNOWLEDGE THAT I AM ASSUMING RESPONSIBILITY FOR THE WORK DONE ON SAID PROPERTY, THE CONDITION OF THE PROPERTY PRIOR TO, DURING, AND AFTER ANY WORK PERFORMED, AND FOR THE PERFORMANCE OF THE SUBCONTRACTORS I HIRE, EMPLOY, OR OTHERWISE CONTRACT OR WITH WHOM I MAKE AGREEMENTS TO PERFORM WORK. I AM VOLUNTARILY AND KNOWINGLY ASSUMING THIS RESPONSIBILITY.

B. () I further certify the following as required by the New Jersey Uniform Construction Code, N.J.A.C. 5:23-2.15(e)1.vii:

I personally prepared the plans submitted for: 1) the new home referred to in A.; or, 2) an addition, alteration, renovation, or repair to an existing single family residence owned and occupied by myself and located on the property listed on Page 1; or, 3) a new structure that will be physically separate from, but that will be deemed part of, an existing single family residence that is owned and occupied by myself and located on the property listed on Page 1.

C. () I further certify that I will perform or supervise the following work:

C.1. () Building C.2. () Fire Protection
I further certify that I will perform the following work:
C.3. () Electrical C.4. () Plumbing

D. () I agree to advise all contractors on this project that they are required to be registered with the New Jersey Division of Taxation and to comply with all New Jersey tax laws.

I further certify the following as required by the Uniform Construction Code, N.J.A.C. 5:23-2.15(a)5: All required State, county, and local prior approvals have been given, including such certification as the construction official may require.

I understand that if any of the above statements are willfully false, I am subject to punishment.

Signature _____ Date _____

II. AGENT SECTION

(to be completed if the applicant is not the owner in fee)

I hereby certify the following as required by the New Jersey Uniform Construction Code, N.J.A.C. 5:32-2.15(d): the proposed work is authorized by the owner in fee; and I have been authorized by the owner in fee to make this application as his agent.

I further certify the following as required by the Uniform Construction Code, N.J.A.C. 5:23-2.15(a)5: All required State, county, and local prior approvals have been given, including such certification as the construction official may require.

I agree to advise all contractors on this project that they are required to be registered with the New Jersey Division of Taxation and to comply with all New Jersey tax laws.

I understand that if any of the above statements are willfully false, I am subject to punishment.

() Check if contractor.

Agent Name _____

Address _____

Telephone (____) _____

Signature _____ Date _____



CONSTRUCTION PERMIT

Date Issued 7-9-93
Control #
Permit # 93-061

IDENTIFICATION Block 67 Lot 5

Work Site Location 35 PINE ST
ALLENHURST NJ

Owner in Fee FRITZ SCHAFER

Address 35 PINE ST

Tele. (657 4515)

Contractor KUNNE POOL

Address RT 88 2155

City BRICK NJ 08724

Tele. 908 299 7080

Lic. No. or Bldrs. Reg. No. 0007 Exp. Date

Federal Emp. No. 222 297 577000

or Social Security No.

is hereby granted permission to perform the following work:

- ☐ BUILDING ☐ PLUMBING ☐ OTHER POOL
☐ ELECTRICAL ☐ FIRE PROTECTION
☐ ELEVATOR DEVICES

DESCRIPTION OF WORK:

18'
ABOVE GROUND
POOL

NOTE: If construction does not commence within one (1) year of date of issuance, or if construction ceases for a period of six (6) months, this permit is void.

Estimated Cost of Work \$ 1728.00

CONSTRUCTION OFFICIAL

PAYMENTS (Office Use Only)

Building 35-

Electrical

Plumbing

Fire Protection

Elevator Devices

Other

DCA Training Fee 1

Cert. of Occ.

Other CQA 20

Total \$56-

Check No.

Cash ✓

Collected By: JE

(see reverse side)

REQUIRED INSPECTIONS

Construction work must be inspected in accordance with the State Uniform Construction Code Regulations N.J.A.C. 5:23-2.18. This agency will carry out such periodic inspections during the progress of work as are necessary to insure that work installed conforms to the approved plans and the requirements of the Uniform Construction Code.

The owner or other responsible person in charge of work must notify this agency when work is ready for any required inspections specified below. Requests for inspections must be made at least 24 hours prior to the time the inspection is desired. Inspections will be performed within three business days of the time for which they are requested. The work must not proceed in a manner which will preclude the inspection until it has been made and approval given.

☐ Required inspections for all subcodes for one and two family dwellings are the following:


1. The bottom of footing trenches before placement of footings, except that in the case of pile foundations, inspections shall be made in accordance with the requirements of the building subcode;
2. Foundations and all walls up to grade level prior to back filling;
3. All structural framing and connections prior to covering with finish or infill material; plumbing underground services, rough piping, water service, sewer, septic services and storm drains; electrical rough wiring, panels and service installations; insulation installations;
4. Installation of all finished materials, sealings of exterior joints; plumbing piping, trim and fixtures; electrical wiring, devices and fixtures; mechanical systems equipment.

☐ Required special inspections. The applicant by accepting the permit will be deemed to have consented to these requirements:

- ☐ A final inspection is required for each applicable subcode area before a final Certificate of Occupancy or Approval may be issued. Any violations of the approved plans and/or permit will be noted and the holder of the permit notified of discrepancies.
- ☐ A complete copy of approved plans must be kept on the job site.

If you do not understand any of this information, please ask.

APPROX HEIGHT OF STAIRS 7'-
STEP STRINGER CUT OUT OF 2X12

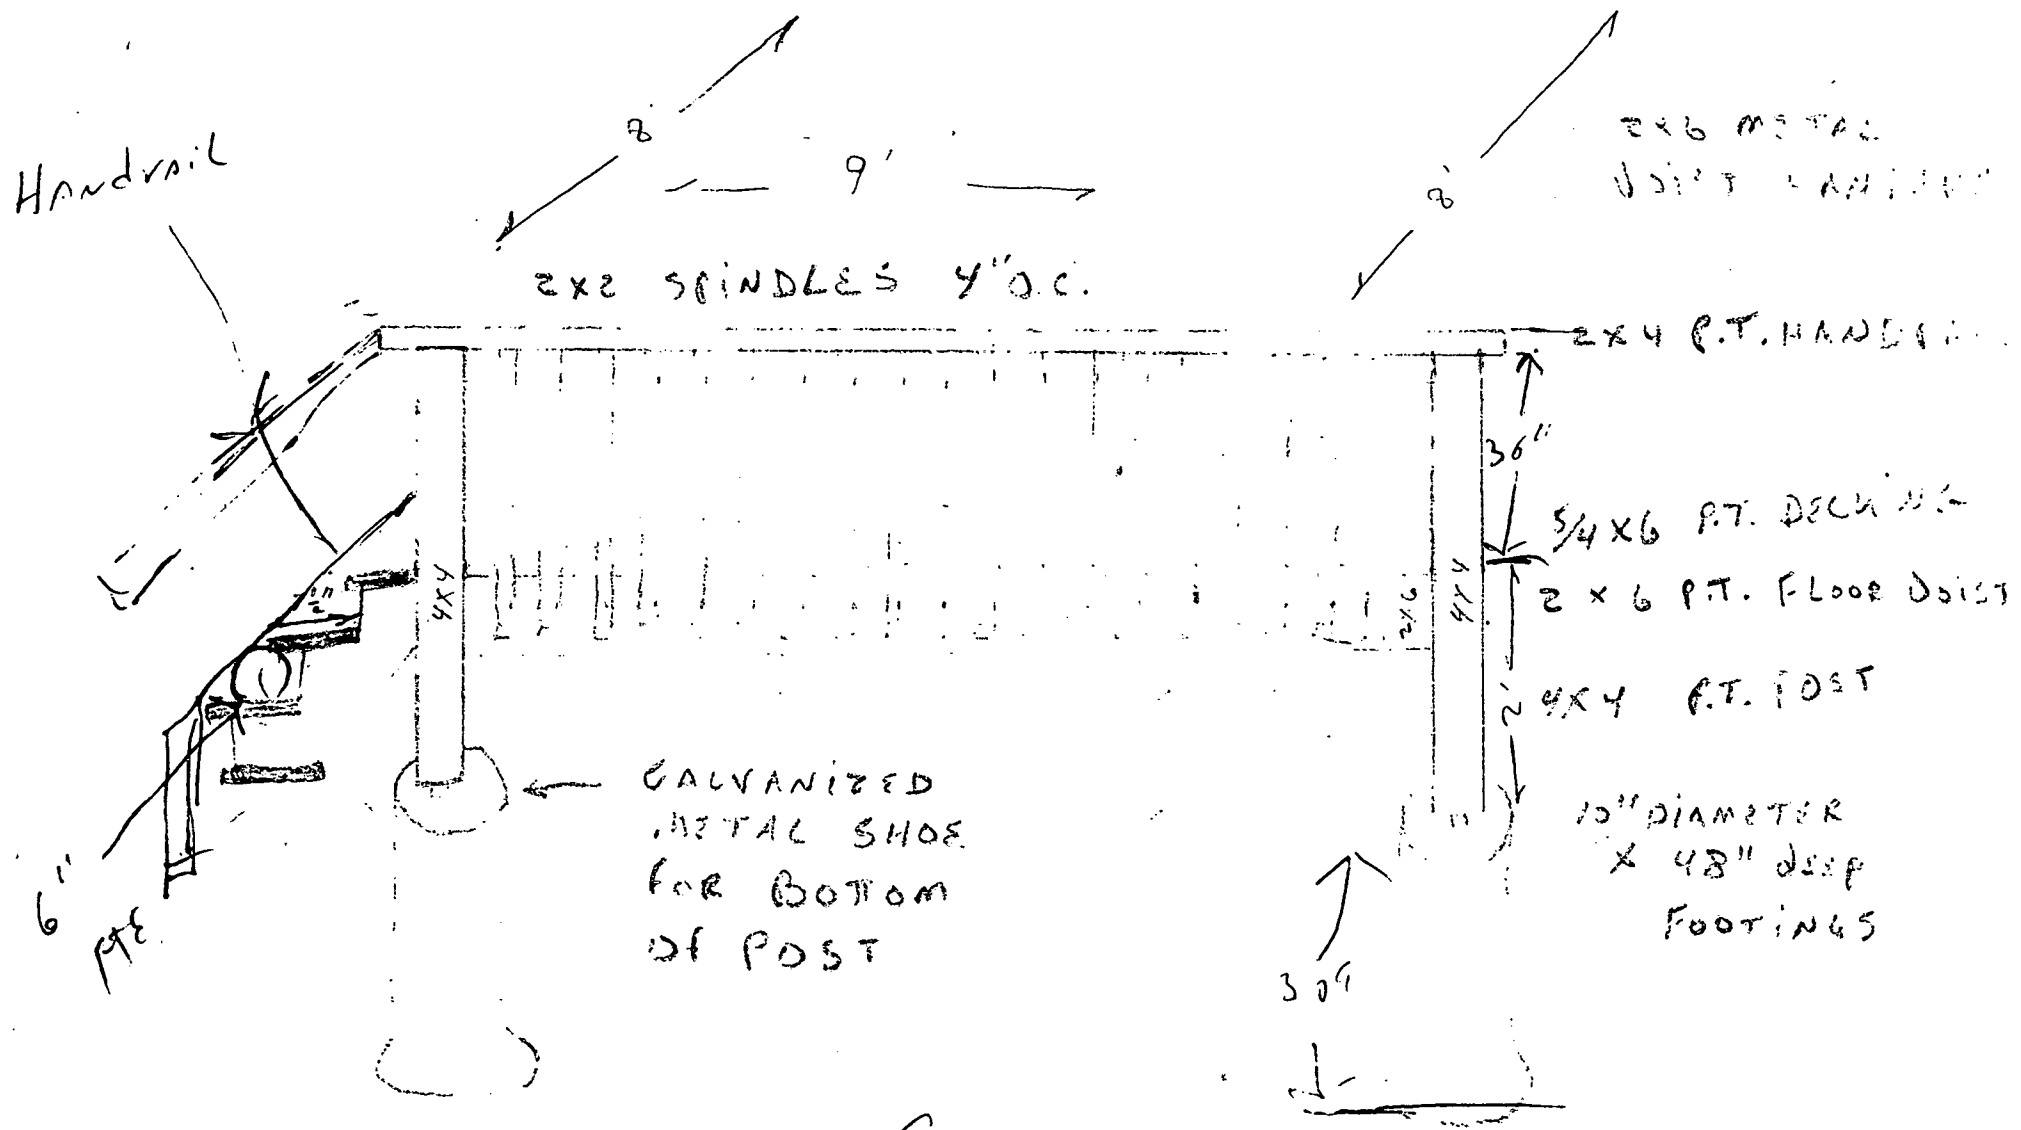

File Copy



CERTIFICATE

Date Issued

Control #

Permit # 93-061

IDENTIFICATION

Block 67 Lot 5
Work Site Location 35 DINE ST
LAKE HAVAS NJ
Owner in Fee FAIR SCHAFER
Address 544 F
Tele. 908 657 4515
Contractor KINNEY POOL
Address 2155 DINE ST
LAKE HAVAS NJ 08724
Tele. 908 999 7000
Lic. No. or Bldrs. Reg. No. 1007
Federal Emp. No. 222 299 577 000
or Social Security No. _____

Home Warranty No. _____

Type of Warranty Plan: [] State [] Private

Use Group _____

Maximum Live Load _____

Construction Classification _____

Maximum Occupancy Load _____

Description of Work/Use:

18' ABOVE GROUND
POOL

☐ CERTIFICATE OF OCCUPANCY

This serves notice that said building or structure has been constructed in accordance with the New Jersey Uniform Construction Code and is approved for occupancy.

☒ CERTIFICATE OF APPROVAL

This serves notice that the work completed has been constructed or installed in accordance with the New Jersey Uniform Construction Code and is approved. If the permit was issued for minor work, this certificate was based upon what was visible at the time of inspection.

☐ TEMPORARY CERTIFICATE OF OCCUPANCY/COMPLIANCE

If this is a temporary Certificate of Occupancy or Compliance the following conditions must be met no later than _____, 19____ or the owner will be subject to fine or order to vacate:

☐ CERTIFICATE OF CONTINUED OCCUPANCY

This serves notice that based on a general inspection of the visible parts of the building there are no imminent hazards and the building is approved for continued occupancy.

☐ CERTIFICATE OF COMPLIANCE

This serves notice that said potentially hazardous equipment has been installed and/or maintained in accordance with the New Jersey Uniform Construction Code and is approved for use until _____.

CONSTRUCTION OFFICIAL _____

Fee \$ _____


Paid [] Check No. _____

Collected by: _____

OK AS DRAWN. NOT SPACE

SHOWN FOR DECK, ETC. 7/6/93

[Signature]

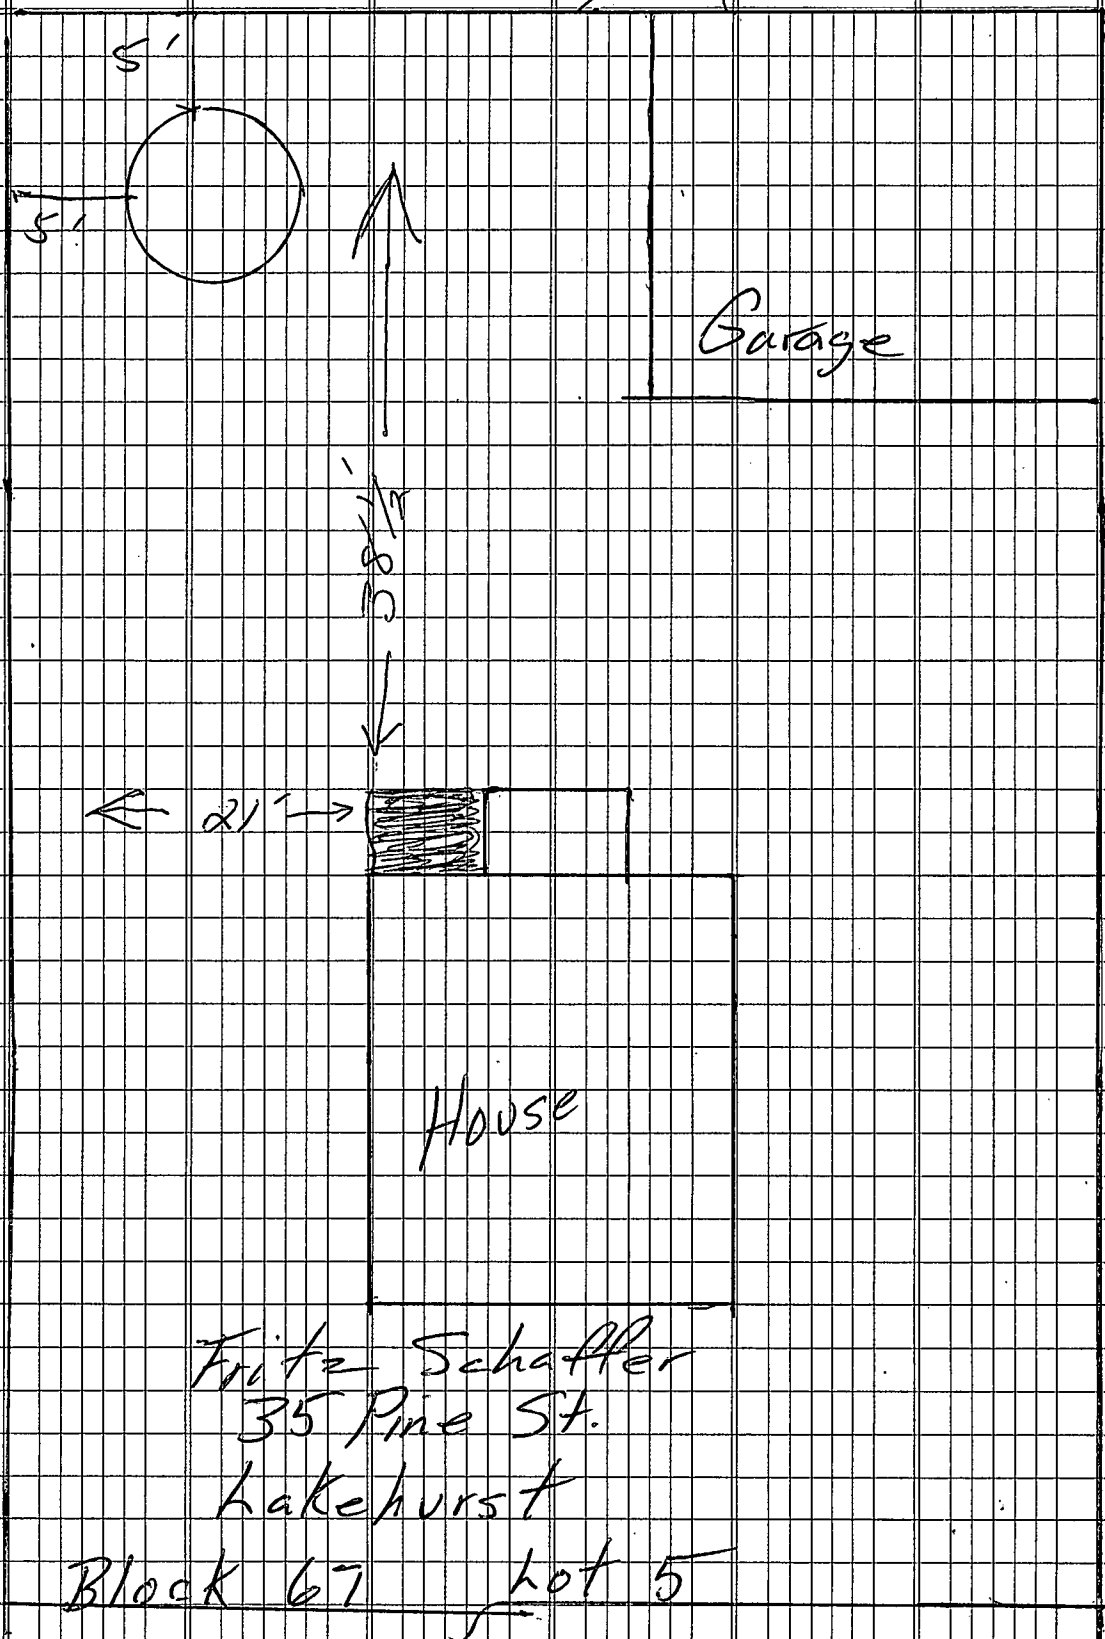

Fritz Schaffer
35 Pine St.
Lakehurst



Block 67 Lot 5

	1	2	3	4	5	6	7	8
1								
2								
3								
4								
5								
6								
7								
8								
9								
10								
11								
12								
13								
14								
15								
16								
17								
18								
19								
20								
21								
22								
23								
24								
25								
26								
27								
28								
29								
30								
31								
32								
33								
34								
35								
36								
37								
38								
39								
40								

UK AS DRAWN. NOT SPACE


SHOWN FOR DECK, ETC. 7/6/93

[Signature]




Garage

8' 1/2



21'



House

Fritz Schaffer
35 Pine St
Lakehurst

Block 67 Lot 5

Clean Sparkling Pools



Model EC-40
HAYWARD PERFLEX
 Extended Cycle Filter

STARTING THE UNIT
 Turn the unit on by the handle on top. The unit will start to pump water. The unit will start to pump water. The unit will start to pump water.

STOPPING THE UNIT
 Turn the unit off by the handle on top. The unit will stop pumping water. The unit will stop pumping water. The unit will stop pumping water.

MAINTENANCE
 The unit should be cleaned regularly. The unit should be cleaned regularly. The unit should be cleaned regularly.

TECHNICAL SPECIFICATIONS
 Pressure - 4 to 10 psi
 Flow Rate - 10 to 15 gpm
 Maximum Working Pressure - 10 psi
 Maximum Operating Temperature - 100°F
 Maximum Flow Rate - 10 gpm
 Maximum Flow Rate - 10 gpm



PERFLEX® Extended Cycle FILTER / 12-86

The ultimate in home pool filtration...

Extended Cycle Filter System


The new Perflex Filter System is the key to clean sparkling pools, day after day. It sets a new standard of performance in home pool filtration, offering features previously found only in professional systems.

Exclusive Perflex Features


- Cleans pools fast — removes even the most minute particles the first time through.
- Performance matched — filter and pump work together in perfect balance.
- Unitized, application-designed system. Filter and pump factory assembled on platform base.
- Patented Flex-Tube™ design gives long filter cycles.
- Cleans without backwashing. Easy to operate.
- Corrosion-free construction. Molded of attractive, high strength Duralon™.
- One size for all pools. Easy to install. Ideal for new or existing pools.




UNION CONNECTION provides simple, direct coupling of pump and filter, eliminating pipe friction and hoses. Self-aligning, ball joint design assures positive sealing without tools. Makes installation and winterizing easy.

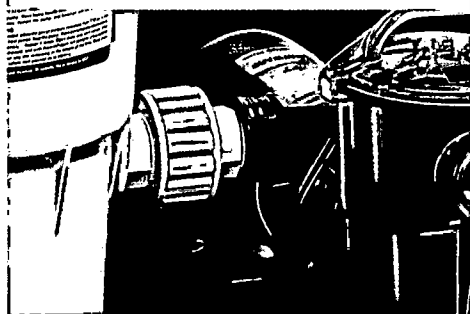


NO BACKWASHING Unique with Perflex. Conventional filters need backwashing to restore flow. Not Perflex! Simply move the "Bump" handle up and down and in less than a minute continue filtering.

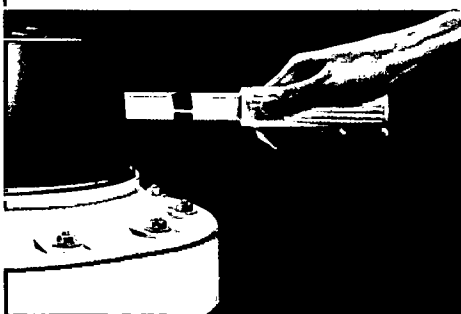


PLATFORM BASE specifically designed for the Perflex System. The base supports filter and pump in perfect alignment. It is molded of rugged structural ABS and cannot rust or corrode.

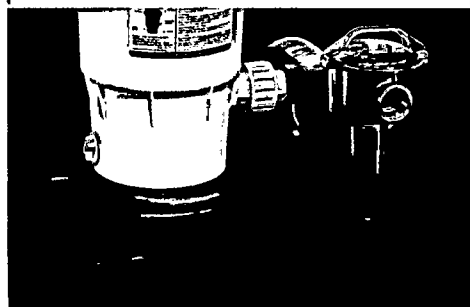

HAYWARD POWER-FLO™ PUMP Corrosion-free, high performance pump with heavy duty motor, heat-resistant seal, large capacity strainer. Flow and pressure are tuned to the filter resulting in a perfectly balanced system.

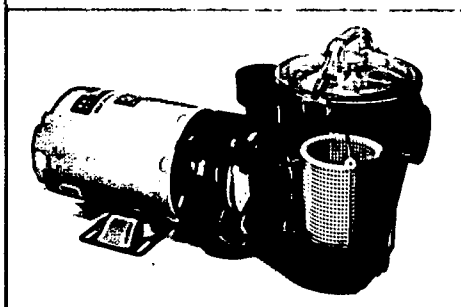

FLEX-TUBE ELEMENTS Perflex is the only swimming pool filter with unique patented Flex-Tube elements. There are 72 Flex-Tubes inside the Perflex Filter. They are the key to the Perflex Filter's unique ability to produce the cleanest, most sparkling pool water possible without backwashing.

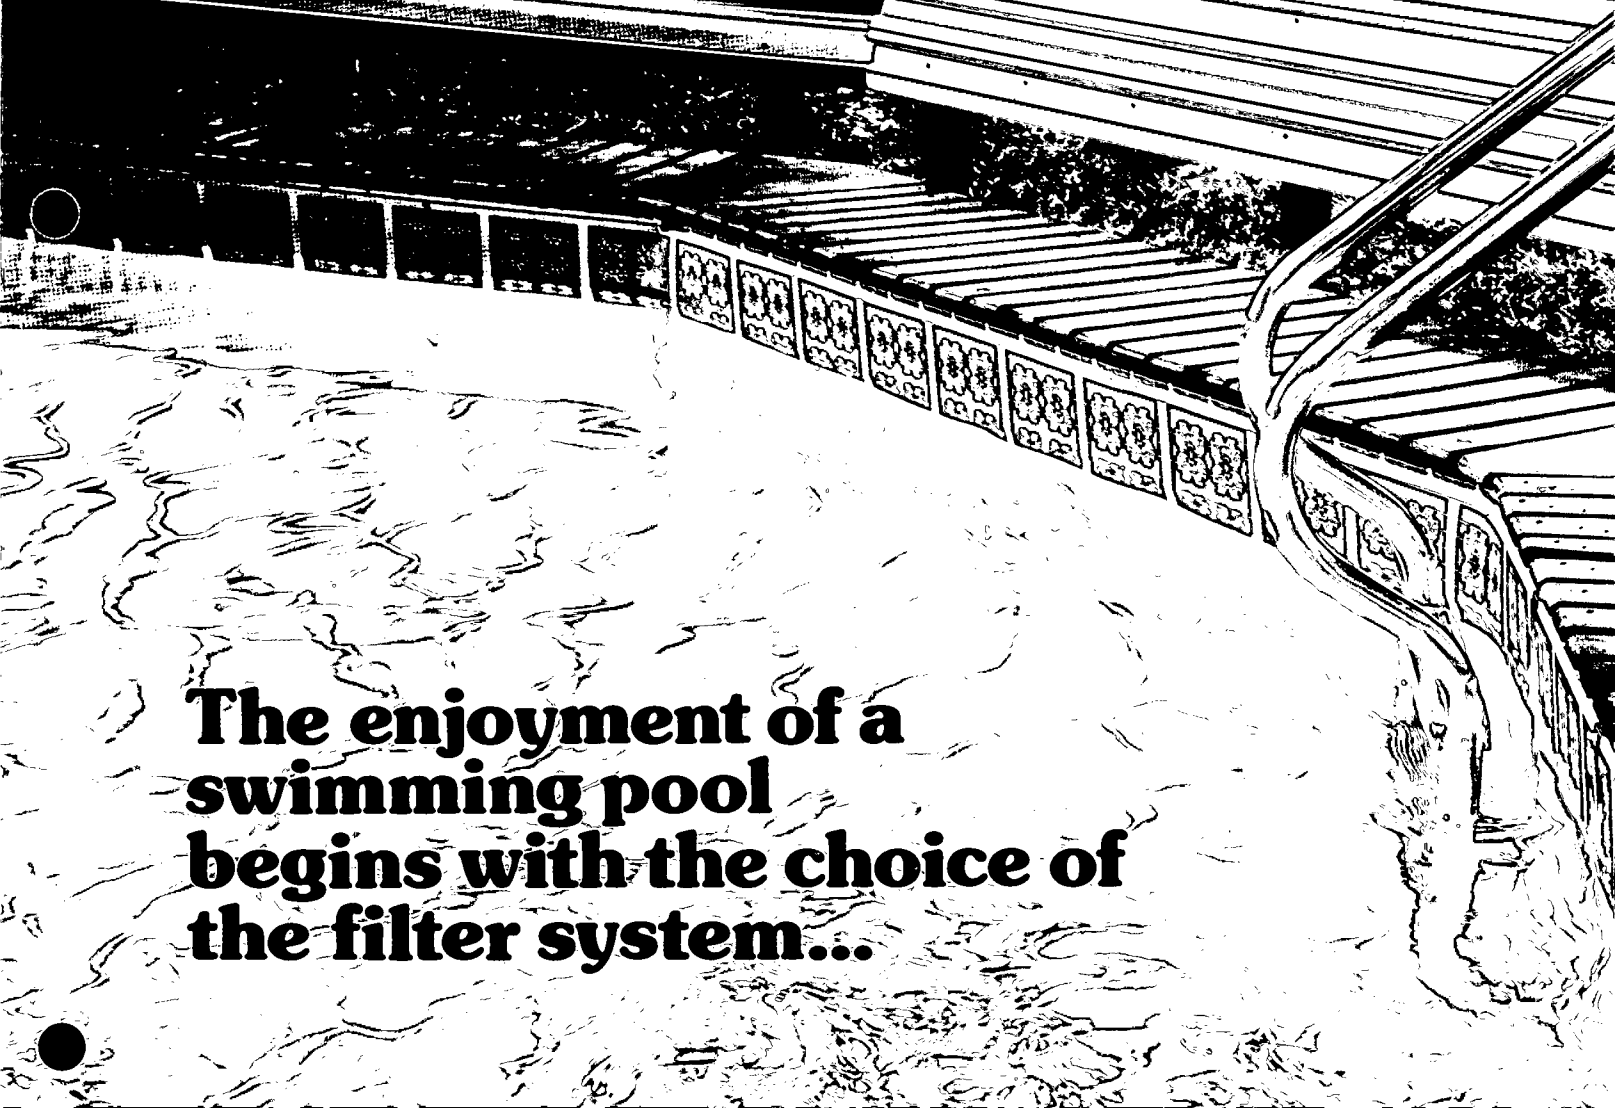

The enjoyment of a swimming pool begins with the choice of the filter system...

One glance at a crystal clear, sparkling swimming pool tells you a lot about Perflex performance. But there's a satisfaction you can only know from owning one. The Perflex performance-tuned system lets you enjoy your pool . . . keeps you swimming, having fun . . . not working!

Perflex filters use diatomite filter powder, (commonly called D.E.), which is so superior a dirt remover, it even removes microscopic dust and pollen. When the filter is first started, D.E. is automatically fed into the filter, where it forms a "working surface" on the Flex-Tubes. Similarly, dirt in the water is stopped on this surface. Eventually, the accumulated dirt will cause the filter pressure to rise and the flow to diminish. This is when conventional systems need backwashing — but not Perflex. With its exclusive "BUMP" action, flow and pressure can be restored without backwashing. Bumping repositions the dirt and D.E. within the filter so the flow of water is no longer impeded. The same D.E. is used over and over again. It's a real work-saving feature as the entire procedure takes less than a minute to complete. When the dirt holding capacity of

the Perflex is reached, cleaning is simple — just "BUMP" and drain.


The Perflex system is economical to operate. Because it uses the same D.E. powder over and over, only 3-4 charges are required during the average pool season. Since Perflex cleans without backwashing, hundreds of gallons of treated pool water are saved, and the problem of waste water disposal is eliminated. Perflex filters also offer less resistance to flow and produce more filtered water with less pump horsepower.

The Perflex System offers you a professional level of performance at an affordable price. It gives year after year convenience . . . dependability . . . and attractiveness, thanks to its superior design and corrosion-free materials that naturally stay young. Most of all, you will enjoy the consistently clean, sparkling water it delivers with such little effort and cost.


Enjoy your pool more. Step up to Perflex — the filter that makes pools more fun.

Perflex Performance

For proper filtration of residential swimming pools, the filter system should provide a complete turnover of the pool water at least once every 12 hours. The EC-40 Series Perflex Filter Systems have the capacity to deliver 2400 gallons of filtered water per hour (40 gpm). This filtration rate provides an 8-hour turnover for a 19,000 gallon pool; and a faster turnover rate for pools of smaller capacity. The economical EC-30 has a 30 gpm average rating (1800 gallons per hour), while the EC-50 has a 50 gpm rating (3000 gallons per hour) to provide extra capacity for larger pools.

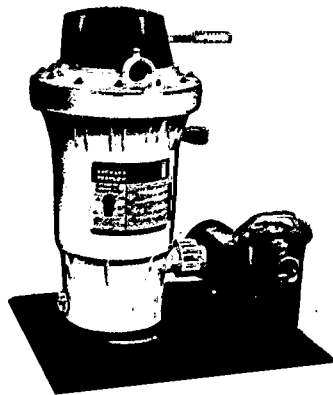


EC-40-75

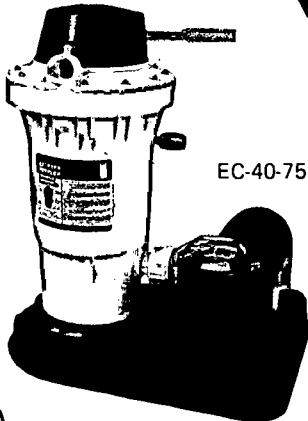

EC-40-75UL



EC-40-2800

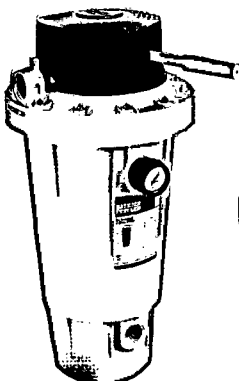

EC-50A



EC-40B

SPECIFICATIONS - EC-30/40/50 Perflex Filter Systems

FILTER TYPE	Perflex Extended Cycle Diatomite
FILTER TANK	Molded Duralon™
FILTER ELEMENTS	Dacron Flex-Tubes
FASTENINGS	Stainless Steel
PUMP & MOTOR	Power-Flo or Max-Flo Pump — 115 volts
MOUNTING BASE	Platform

EC-30-50E System: EC-30 Filter assembled with ½ HP Power-Flo pump, union connection, low profile base, built-in check valve, pressure gauge, drain plug and 6 ft. power cord.

EC-40-75 System: EC-40 Filter assembled with ¾ HP Power-Flo pump, union connector, platform base, built-in check valve, pressure gauge, drain plug and 6 ft. power cord.

EC-40-75UL System: Same as EC-40-75, except with elevated platform base, pump rainshield and switch, drain plug and 25 ft. power cord.

EC-40-2800 System: EC-40A Filter with UL Max-Flo pump, 3-way selector valve and connecting loop on molded elevated platform base. Includes built-in check valve, pressure gauge, selector valve, 1½" drain valve.

EC-40-1700 System: EC-40A Filter with Power-Flo II pump and sweep union connection on molded elevated platform base. Includes built-in check valve, pressure gauge, 1½" drain valve.

EC-50 Series System: Use EC-50A filter in place of EC-40A to build modular Selecta-Systems™ with filter, pump Base Pak selections.

Perflex Filters are also offered without pump to meet various pool filtration requirements. This allows the use of a wide selection of pump models for specific needs — whether new or replacement systems.

Basic Filter Modular: EC-40A Filter with built-in check valve, pressure gauge, drain valve. EC-50A Filter with built-in check valve, pressure gauge/inspection port, drain valve.

Basic Filter: EC-30B Filter with built-in check valve, pressure gauge, plug. EC-40B Filter with built-in check valve, pressure gauge, plug.

EC-40F-KIT: Universal pump mounting bracket, clear filter connecting hose, adapters, clamps and mounting hardware. For EC-40 or EC-50 Filter.

PERFORMANCE - EC-30/40/50 Series Filters

FILTRATION RATE*	TURNOVER (U.S. GALLONS)	
	8 Hrs.	10 Hrs.
30 gpm	14,400	18,000
40 gpm	19,200	24,000
50 gpm	24,000	30,000

*Controlled by pump selection.



HAYWARD POOL PRODUCTS, INC.



Hayward Pool Products, Inc.
900 Fairmount Avenue
Elizabeth, NJ 07207

Hayward Pool Products, Inc.
2875 Pomona Boulevard
Pomona, CA 91768

Hayward Pool Products Canada
6597 Kitimat Road
Mississauga, Ontario L5N4J4

Hayward S.A.
245. Rue Du Rond Point
B6060 Gilly, Belgium


Printed in U.S.A.

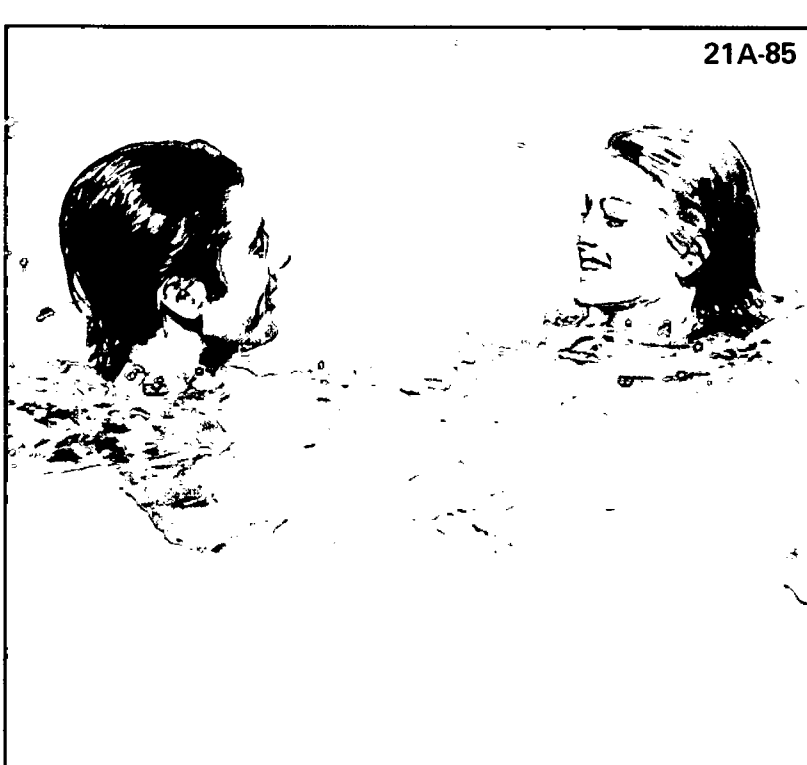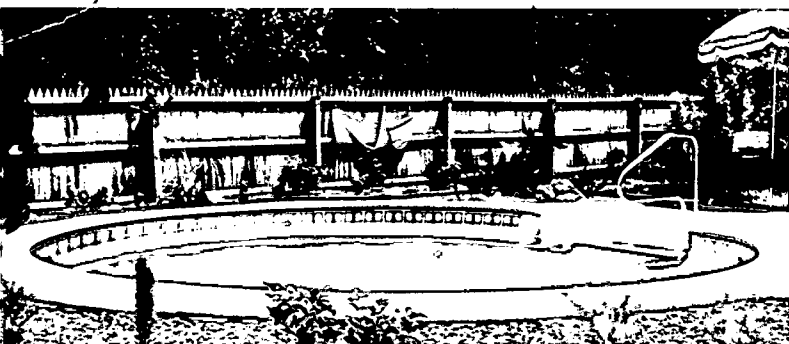

The Standard of Excellence for Mid-Size Pools and Spas

A compact, high performance, self-priming pump designed specifically for mid-sized in-ground pools and spas — the dependable, corrosion-proof **Power-Flo II™** pump by Hayward.

Today's pool systems and accessories need extra power and reliability to operate efficiently and economically. Now, through the use of modern materials and new design technology, the Power-Flo II gives you a high performance, low maintenance pump at an affordable price. It incorporates professional features previously found only in larger, high priced pumps. From heavy-duty motor and rapid prime 60 GPM output, to large capacity see-thru strainer, the Power-Flo II sets the standard for value and performance.

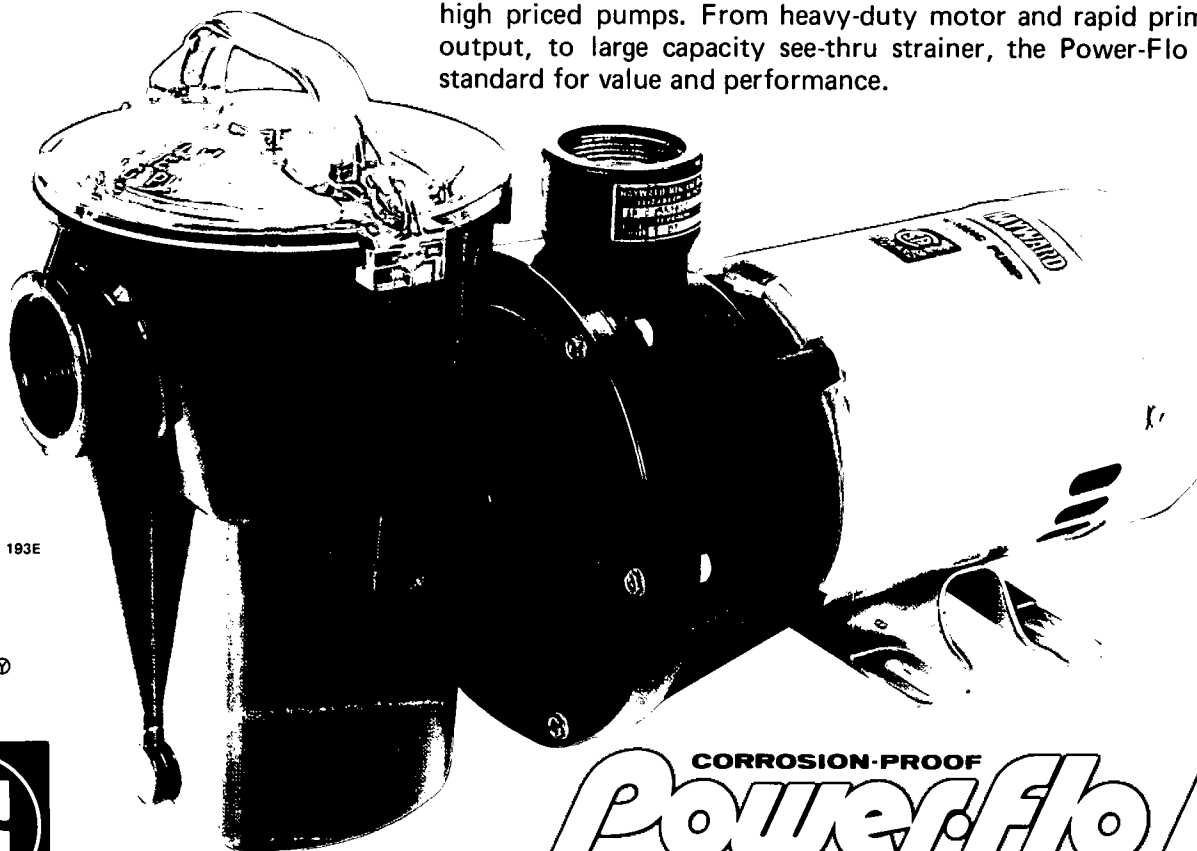


CORROSION-PROOF
Power-Flo II™
SELF-PRIMING PUMP

FEATURES

- 1 Heavy-duty, high performance motor with stainless steel motor shaft. Built-in automatic thermal overload protection. Electrically isolated and insulated from pool water for extra safety.
- 2 Heat resistant ceramic double-sized seal. Lexan® seal receiver diffuses heat caused by friction to give long, dependable seal life. 100% drip-proof.
- 3 Housing injection molded of rugged corrosion-proof fiberglass filled Permaglass for years of service with minimum care. Unique, integral diffuser assures rapid priming even under extreme lift conditions.
- 4 Fiberglass filled Noryl impeller. Smooth, wide openings prevent fouling or clogging by hair and debris. Engineered for maximum efficiency and smooth, trouble-free operation.
- 5 Large capacity injection molded hair and lint basket, for even the heaviest debris loads. Swing aside bale handle for easy lift out and cleaning.
- 6 Built-in suction check valve assures priming water for instant starts. Ideal for above grade installations.
- 7 Quick-release clear "See-Thru" hair and lint strainer cover. Convenient, hand-sized handle grip for smooth, ¼ turn locking and unlocking. Neoprene O-ring for dependable, positive sealing.


DIMENSIONS

1½" FPT INLET & OUTLETS

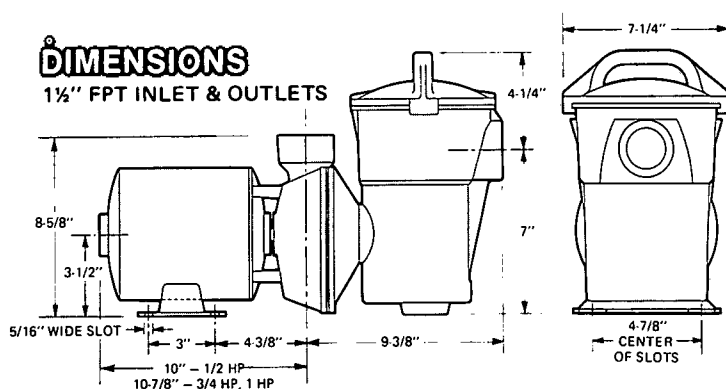


PERFORMANCE DATA

115 VOLT 60 CYCLE SINGLE PHASE

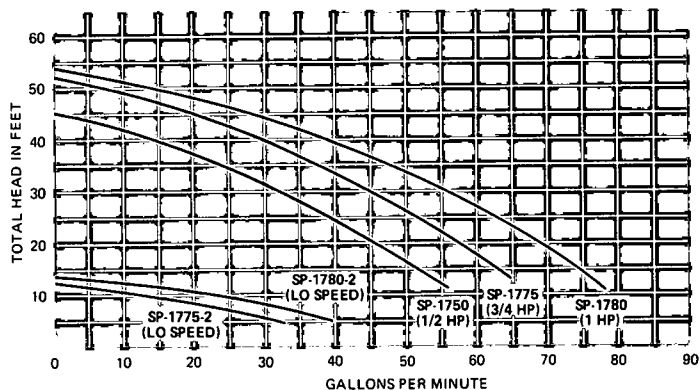

CORROSION-PROOF Power-Flo II™ SELF-PRIMING PUMP

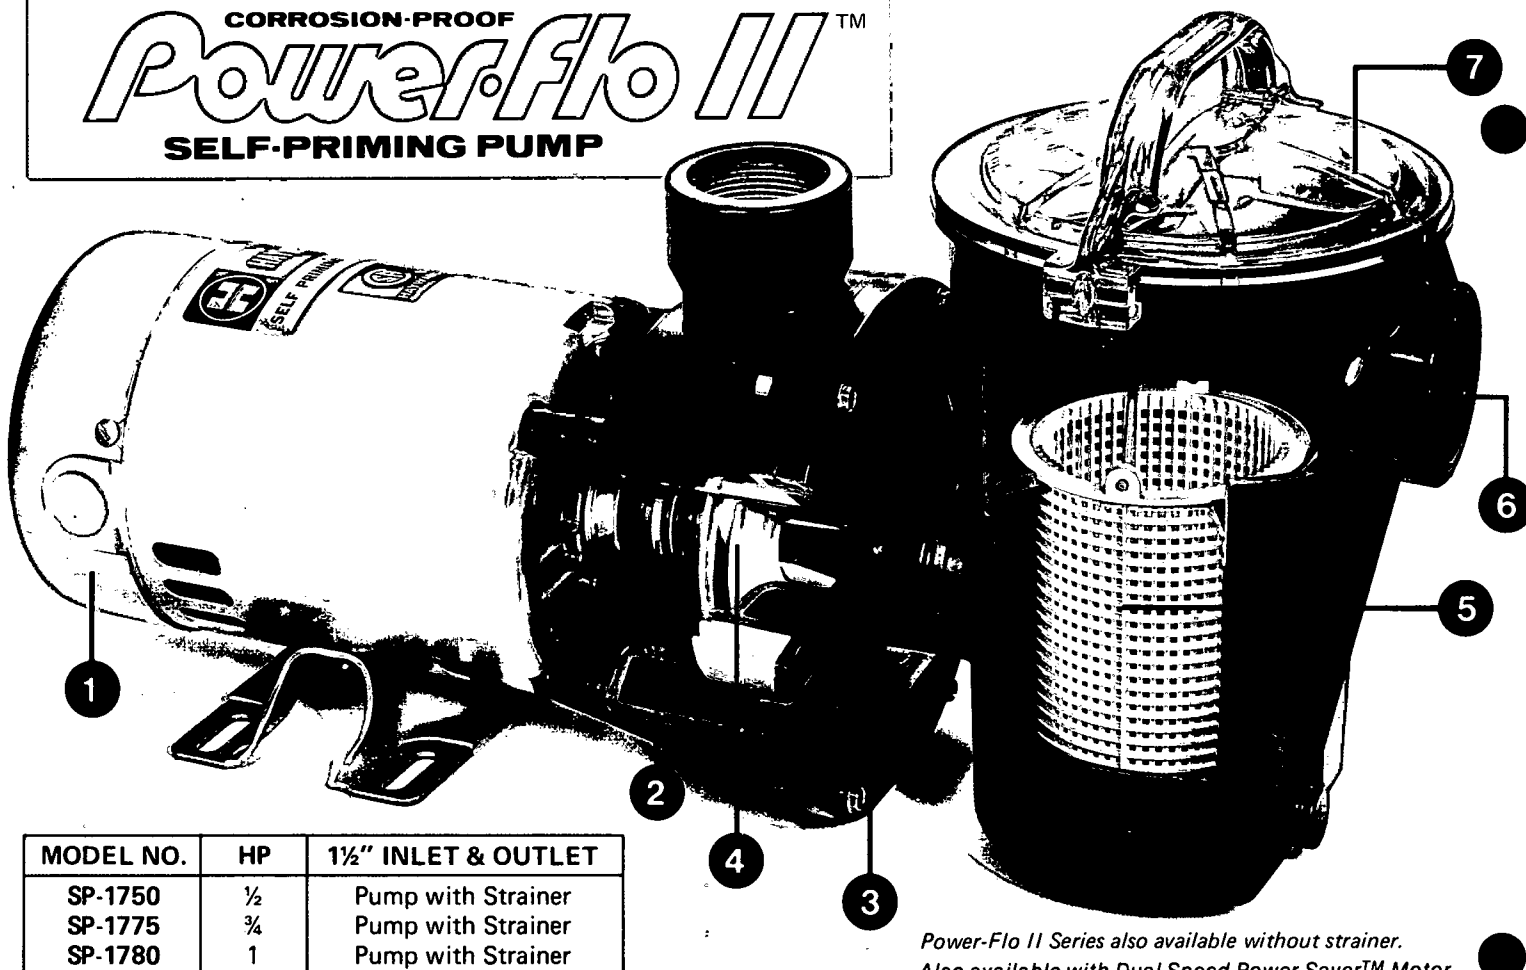

Power-Flo II Series also available without strainer.
Also available with Dual Speed Power Saver™ Motor.

MODEL NO.	HP	1½" INLET & OUTLET
SP-1750	½	Pump with Strainer
SP-1775	¾	Pump with Strainer
SP-1780	1	Pump with Strainer



HAYWARD POOL PRODUCTS, INC.

900 FAIRMOUNT AVENUE, ELIZABETH, NEW JERSEY 07207 / Phone: (201) 351-5400

A Hayward Industries Company

© 1986 Hayward Printed in U.S.A.