

A

B

- C

D

- F

G

110 VAC 20 amp
dedicated, marked,
and locked power
supply.

FACP — To Initialization Devices

DACT — To Notification Appliances

Connected to two (2)
dedicated POTS telephone
lines.


MOUNTING HEIGHTS

A - Exterior Horn/Strobes mounted between 96 and 120 inches.

B - Interior Horn/Strobes or Strobes mounted between 80 and 96 inches.

C - Fire Alarm Control Panel and Annunciators mounted at 60 inches for the display board.

D - Manual Pull Stations mounted between 42 and 48 inches to the operable part.

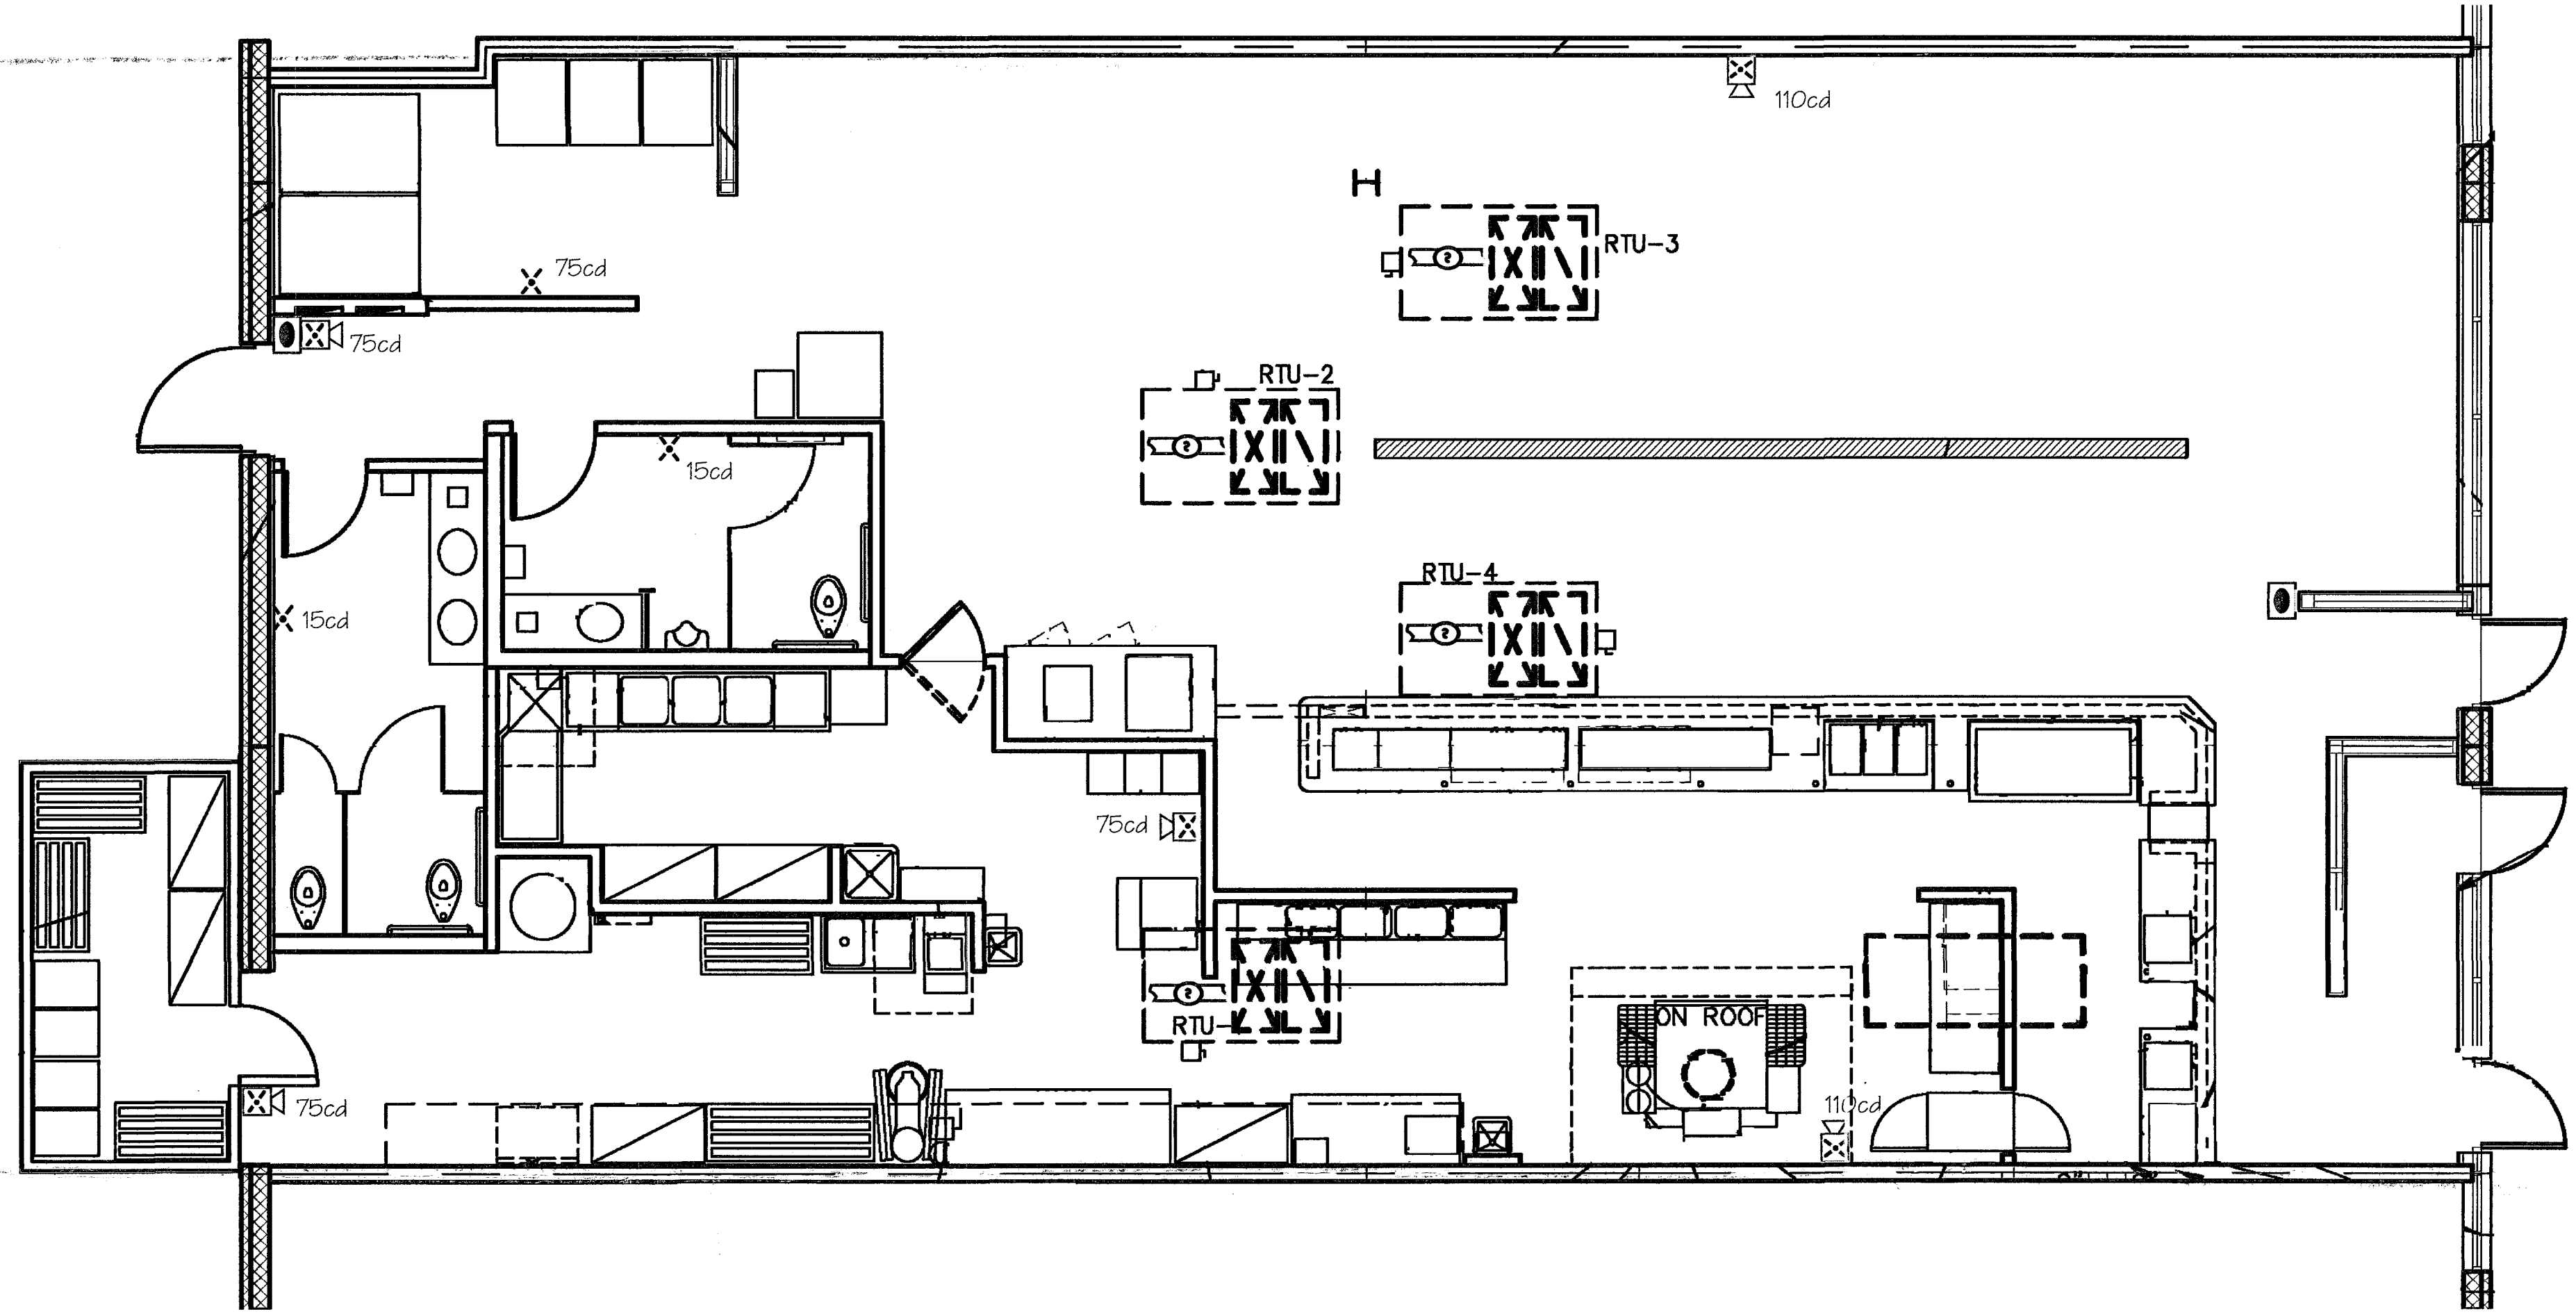

BUILDING SUB-CODE _____
PLUMBING SUB-CODE _____
ELECTRICAL SUB-CODE _____
FIRE SUB-CODE 4102 8.20.12
CONSTRUCTION OFFICIAL [Signature] 8/20/12

A

B


C

D

E

F

FA-1

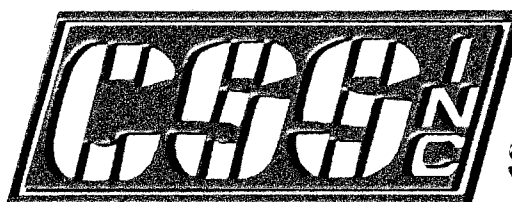

**94 Vanderburg Road
Marlboro, NJ 07746
(732) 780-6787
Fax: (732) 845-4789
etesecuritysystems.com
etesecuritysystems.com
Permit Number P00064
Number 13VH00506400**

Cici's Pizza
2431 US Route 1 (Block 4.46, Lot 1.04)
North Brunswick, NJ

JOB NO:	DRAWN BY: Bob Pfleger	FILE NAME: Cicis.cdr
DATE: 8/14/12	DESIGN BY: Rik Ambjor	
SCALE: 1/4" = 1'	THIS DRAWING DESIGN, AND DETAIL ARE THE PROPERTY OF COMPLETE SECURITY SYSTEMS, INC., AND IS SUBMITTED FOR CONFIDENTIAL INSPECTION. IT IS NOT TO BE COPIED OR USED IN ANY MANNER WITHOUT THE EXPRESSED WRITTEN CONSENT OF COMPLETE SECURITY SYSTEMS, INC.	
SIZE:		