

3-27-72
JH

4-18-72
W/S-JL

WASHINGTON TOWNSHIP
MUNICIPAL BUILDING
Long Valley, N. J. 07853

BOARD OF HEALTH Permit No. 52
(License) (Permit) TO LOCATE AND CONSTRUCT OR ALTER
A WATER SUPPLY

PERMISSION IS HEREBY GRANTED Richard Acres (D. Haring)
Name of Owner or Contractor

☒ locate and construct
to ☐ alter a water supply

at Block No. 42A Lot No. 13 Street 19 Flintlock Drive as shown on

Application for Permit to Locate and Construct a Water Supply
Number

Application for Permit to Alter a Water Supply

Dated _____, in accordance with the provisions of an
ordinance entitled:

"AN ORDINANCE establishing a code regulating the location, construction, alteration, use and supervision
of individual and semipublic water supplies, requiring certain permits, providing for the inspection of such
supplies, the fixing of fees and prescribing penalties for violations."

Date: 8-25-71

P20-
RBN

Board of Health of Washington Township

RH Dineen
For the Board of Health

Municipal Building
Long Valley, N. J. 07853

INDIVIDUAL, SEMI-PUBLIC, PUBLIC WATER SUPPLY NO. _____

NEW Y or ALTERNATION _____ SEWAGE DESIGN NO. _____

OWNER PARKER ACRES, INC.

ADDRESS CHESTER, NEW JERSEY

WELL LOCATION X SECTION I BLOCK 42A LOT NO. 13

STREET 19 FLINTLOCK DRIVE

NAME & ADDRESS OF CONTRACTOR BRYAN DRILLING COMPANY

BOX 274, CHESTER, N.J.

TYPE OF WELL OR SOURCE _____ DRILLED

ESTIMATED DEPTH 125 FEET

ESTIMATED DEPTH OF CASING _____ 50 FEET

METHOD OF SEALING _____ CEMENT GROUT

PUMPING EQUIPMENT _____ SUBMERSIBLE PUMP

PURIFICATION FACILITIES IF REQUIRED _____

NUMBER OF REALTY IMPROVEMENTS TO BE SERVED. ONE

SIZE OF PROPOSED WATER MAINS _____

ESTIMATED WATER DEMANDS AND BASIS OF ESTIMATES 5 G.P.M.

DESCRIBE TYPE OF ALTERATION PROPOSED _____

Before a Certificate of Occupancy can be issued sampling of water system must be taken and well log must be submitted to the Board of Health.

ALL WELLS MUST BE SAMPLED BEFORE USE

THINGS TO DO BEFORE SAMPLING OF WELL:

1. - Well must be sterilized. Procedure:
 - a. Place ½ gallon of chlorox in well.
 - b. Allow chlorox to remain in well for 24 hours.
 - c. Pump well until chlorox or chlorine odor has disappeared.
 - d. Call Board of Health office 876-3315 for water sample.Give well permit number when requesting sample.

ITEMS TO BE SHOWN ON REVERSE SIDE:

1. - Plot plan to scale showing: (SEE ATTACHED SKETCH)
- a. size of lot.
 - b. location of building.
 - c. location of proposed water supply.
 - d. location of sewage facilities within 100' of the water supply.


BRANDES ENGINEERING COMPANY

455 EAST MAIN STREET
CITESTER, NEW JERSEY, 07930

F. A. BRANDES
P. E. & L. S. 12122

P. O. BOX 351

TELEPHONE
201 - 879-7333

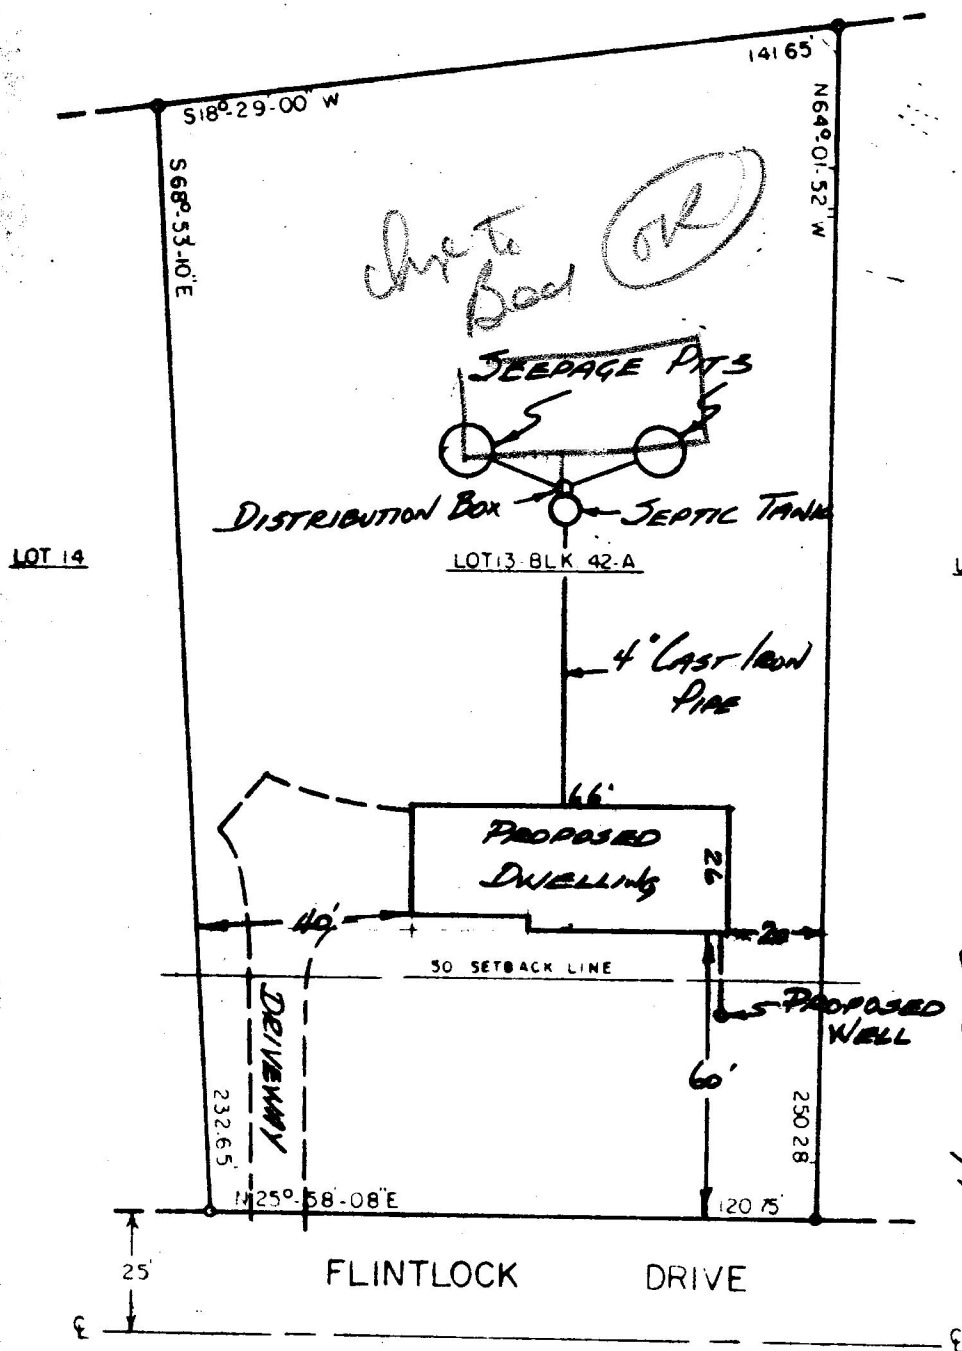

- NOTES ① DRIVEWAY TO BE CONSTRUCTED TO TOWNSHIP SPECIFICATIONS.
- ② WELL MUST BE 100 FT FROM SEPTIC SYSTEM AND ADJACENT WELLS.

PROPERTY OF

SITE PLAN

PARKER ACRES SECTION I

WASHINGTON TOWNSHIP, MORRIS COUNTY,
NEW JERSEY

SCALE 1" = 40'

JANUARY, 1970

Fred A. Brandes
FRED A. BRANDES P. E. & L. S. 12122