



Applicant Completes: Sections I, II, III (optional), IV, VI, and VII C-15-00335 S

I. IDENTIFICATION

1. Proposed Work Site at: 1606 W. PRINCETON Ave

2. Name of Owner in Fee: RUCC GARCIA

Tel. _____ e-mail _____

Address BRICK

3. Ownership in Fee: Public _____ Private _____

4. Principal Contractor: _____ Tel. (_____) _____

Address _____ e-mail _____

License No. OR, if new home, Builder Reg. No. _____ Exp. Date _____

ble): _____

_____) _____

NJR Home Services

1415 Wyckoff Rd., Wall NJ 07719

Tel. 1.877.466.3657 Fax. 732-938-3010

Contractor License No. 13VH00361500

Federal Employee No. 22-3609806

JOSEPH MARAZZO TEL. 732-919-8090

Ila. PROPOSED WORK

- | | | | |
|---|--|--|---|
| ☐ Minor Work | ☐ New Building | ☐ Addition | ☐ Demolition |
| ☐ Repair | ☐ Alteration | ☐ Renovation | ☐ Reconstruction |
| ☐ Asbestos Abat. -Subch. 8 | ☐ Lead Hazard Abatement | ☐ Radon Remediation | ☐ Annual Permit |

11b. SUBCODES

(Check all that apply)

- ☐ Building
- ☐ Electrical
- ☐ Plumbing
- ☐ Fire Protection
- ☐ Elevator

TOTAL COST

FOR OFFICE USE ONLY (Optional)

[illegible]

III. PLAN REVIEW (optional)

DO YOU WANT:

1. ☐ Partial Releases
2. ☐ Prototype Processing

IV. DOES OR WILL YOUR BUILDING CONTAIN ANY OF THE FOLLOWING?

1. ☐ Elevators/Escalators/Lifts/
Dumbwaiters/Moving Walks
2. ☐ High Pressure Boilers
3. ☐ Pressure Vessels
4. ☐ Refrigeration Systems
5. ☐ Cross-Connections/Backflow Preventers
6. ☐ Hazardous Uses/Places of Assembly
7. ☐ Sprinklers/Standpipes
8. ☐ Smoke Control Systems in Open Wells
9. ☐ Underground Storage Tanks
10. ☐ Swimming Pools, Spas and Hot Tubs
11. ☐ LPGas Tanks
12. ☐ Fire Alarm

V. FEE SUMMARY (for office use only)

1. Building	\$	40	✓		
2. Electrical					
3. Plumbing		50	✓		
4. Fire Protection					
5. Elevator Devices					
6. Subtotal					
7. Less 20% for State Plan Review	\$				
8. Subtotal	\$	14	✓		
9. State Permit Surcharge Fee					
10. Subtotal	\$				
11. Cert. of Occupancy					
12. Other					
13. TOTAL	\$	104	✓		

VI. BUILDING/SITE CHARACTERISTICS

(office use only)

1. Number of Stories _____
2. Height of Structure _____ ft.
3. Area — Largest Floor _____ sq. ft.
4. New Building Area _____ sq. ft.
5. Volume of New Structure _____ cu. ft.
6. Max. Live Load _____
7. Max. Occupancy Load _____
8. If Industrialized Building: State Approved _____ HUD _____
9. Total Land Area Disturbed _____ sq. ft.
10. Flood Hazard Zone _____
11. Base Flood Elevation _____ ft.
12. Wetlands yes _____ no _____

VII. DESCRIPTION OF BUILDING USE

A. RESIDENTIAL (primary use)

1. State Specific Use: _____
 2. Use Group, Proposed: _____
 3. Change in Use Group, Indicate Present:
 4. No. of dwelling units: Total Units Income-restricted
- | | | |
|----------------|-------|-------|
| Gained, Sale | _____ | _____ |
| Gained, Rental | _____ | _____ |
| Lost, Sale | _____ | _____ |
| Lost, Rental | _____ | _____ |

B. NON-RESIDENTIAL (primary use)

1. State Specific Use: _____
2. Use Group, Proposed: _____
3. Change in Use Group, Indicate Present: _____
- C. MIXED USE -List secondary use(s): _____
- D. Construct. Classification: Present _____
- Proposed _____

I. OWNER SECTION (to be completed if the applicant is the owner in fee)

I hereby certify that I am the owner in fee of the property listed on Page 1.

Mark the following applicable boxes:

- A. () I further certify that a new home (private residence) will be constructed on this property for my own use and occupancy. This dwelling is to be occupied by myself and is not to be used for any purpose other than single family residential use. I attest that all construction, plumbing, or electrical work will be done, in whole or in part, by me or by subcontractors under my supervision, in accordance with all applicable laws; and, I further acknowledge that said new home is not covered under the New Home Warranty and Builders Registration Act (N.J.S.A. 46:3B-1 et seq.) and that such fact shall be disclosed to any person purchasing this property within ten years of the date of issuance of a certificate of occupancy.

I UNDERSTAND THAT IN MARKING BOX A, I ACKNOWLEDGE THAT I AM ASSUMING RESPONSIBILITY FOR THE WORK DONE ON SAID PROPERTY, THE CONDITION OF THE PROPERTY PRIOR TO, DURING, AND AFTER ANY WORK PERFORMED, AND FOR THE PERFORMANCE OF THE SUBCONTRACTORS I HIRE, EMPLOY, OR OTHERWISE CONTRACT OR WITH WHOM I MAKE AGREEMENTS TO PERFORM WORK. I AM VOLUNTARILY AND KNOWINGLY ASSUMING THIS RESPONSIBILITY.

- B. () I further certify the following as required by the New Jersey Uniform Construction Code, N.J.A.C. 5:23-2.15(f)1.ix:

I personally prepared the plans submitted for: 1) the new home referred to in A.; or, 2) an addition, alteration, renovation, or repair to an existing single family residence owned and occupied by myself and located on the property listed on Page 1; or, 3) a new structure that will be physically separate from, but that will be deemed part of, an existing single family residence that is owned and occupied by myself and located on the property listed on Page 1.

- C. () I further certify that I will perform or supervise the following work:

- C.1. () Building C.2. () Fire Protection

I further certify that I will perform the following work:

- C.3. () Electrical C.4. () Plumbing

- D. () I agree to advise all contractors on this project that they are required to be registered with the New Jersey Division of Taxation and to comply with all New Jersey tax laws.

I further certify the following as required by the Uniform Construction Code, N.J.A.C. 5:23-2.15(a)5: All required State, county, and local prior approvals have been given, including such certification as the construction official may require.

I understand that if any of the above statements are willfully false, I am subject to punishment.

Signature _____ Date _____

II. AGENT SECTION (to be completed if the applicant is not the owner in fee)

I hereby certify the following as required by the Uniform Construction Code, N.J.A.C. 5:23-2.15(d): the proposed work is authorized by the owner in fee; and I have been authorized by the owner in fee to make this application as his agent.

I further certify the following as required by the Uniform Construction Code, N.J.A.C. 5:23-2.15(a)5: All required State, county, and local prior approvals have been given, including such certification as the construction official may require.

I agree to advise all contractors on this project that they are required to be registered with the New Jersey Division of Taxation and to comply with all New Jersey tax laws.

I understand that if any of the above statements are willfully false, I am subject to punishment.

- () Check if contractor.

A NJR Home Services
A 1415 Wyckoff Rd., Wall NJ 07719
Tel. 1.877.466.3657 Fax. 732-938-3010
Contractor License No. 13VH00361500
- Federal Employee No. 22-3609806

JOSEPH MARAZZO TEL. 732-919-8090

- III. () LEAD HAZARD ABATEMENT. Include Homeowner or Landlord Owner Affidavit as per N.J.A.C. 5:17.



Brick Township
401 Chambersbridge Rd
Brick, NJ 08723

Date Issued 09/12/2014
Control Number C-13-003353
Permit Number 14-2251
Permit Issue Date 07/16/2014
Certificate Number 14-2251

Certificate

Construction Code Division
(Certificate of Approval)

Identification

Work Site Location: 1606 W. PRINCETON AVE. Brick Township, NJ Block: 821 Lot: 7 Qual: _____
Owner in Fee: GARCIA, BRUCE & MAUREEN
Owner Address: 1606 W PRINCETON AVE BRICK NJ 08724
Telephone: [REDACTED]
Contractor: NJR HOME SERVICES
Address: 1415 WYCKOFF ROAD WALL NJ 07719
Telephone: (732) 919-8172 Fax: (732) 938-3010
License Number or Builders Registration Number: 12312 13VH00361500 Federal Emp. Number: 22-3609806

Home Warranty Number: _____

Type of Warranty Plan: ☐ State ☐ Private

Use Group: R-5 Construction Classification: _____

Maximum Live Load: 0 Maximum Occupancy Load: 0

Description of Work/Use: REPLACEMENT A/C

Certificate Comments:

☐ **Certificate of Occupancy**

This serves notice that said building or structure has been constructed in accordance with the New Jersey Uniform Construction Code and is approved for occupancy.

☒ **Certificate of Approval**

This serves notice that the work completed has been constructed or installed in accordance with the New Jersey Uniform Construction Code and is approved. If the permit was issued for minor work, this certificate was based upon what was visible at the time of inspection.

☐ **Certificate of Continued Occupancy**

This serves notice that based on a general inspection of the visible parts of the building there are no imminent hazards and the building is approved for continued occupancy.

☐ **Temporary Certificate of Compliance**

The following conditions must be met no later than or the owner will be subject to fine or order to vacate:

This certificate has an expiration date of:

Conditions to be met:

☐ **Certificate of Clearance - Lead Abatement 5:17**

This serves notice that based on written certification, lead abatement was performed as per NJAC5:17 to the following extent.

- ☐ Total removal of lead-based paint hazards in scope of work
☐ Partial or limited time period (years); see file

☐ **Certificate of Clearance - Asbestos Abatement**

This serves notice that based on written certification, asbestos abatement was performed to the following extent.

- ☐ Total removal of asbestos hazards in scope of work
☐ Partial or limited time period (years); see file

☐ **Certificate of Compliance**

This serves notice that said potentially hazardous equipment has been installed and/or maintained in accordance with the New Jersey Uniform Construction Code and is approved for use until

☐ **Temporary Certificate of Occupancy**

The following conditions must be met no later than: or the owner will be subject to fine or order to vacate:

This certificate has an expiration date of:

Conditions to be met:

Construction Official

Date Printed: 09/12/2014

U.C.C. F260 (rev. 08/05)

Fee: \$0.00

Check Number: _____

Collected By: _____

Page 1



ELECTRICAL SUBCODE TECHNICAL SECTION



A. IDENTIFICATION—APPLICANT: COMPLETE ALL APPLICABLE INFORMATION. WHEN CHANGING CONTRACTORS, NOTIFY THIS OFFICE. CALL UTILITY DIG NO. 1-800-272-1000.

Block 821 Lot 7 Qualification Code _____

Work Site Location 1606 W Princeton Ave

Brick

Owner in Care Bruce Garcia

Tel. () _____ e-mail _____

Address _____

Contractor: NJR HOME SERVICES street 1415 WYCKOFF ROAD municipality Tel. (732) 938-1105 zip code

Address WALL, NJ 07719 e-mail _____

Contractor License No. 12312 Exp. Date 3/15

Home Improvement Contractor Registration No. or Exemption Reason (if applicable): 13VH00361500
22-3609806 FAX: (732) 938-3010

Federal Emp. ID No. _____

B. ELECTRICAL CHARACTERISTICS

Use Group Present X Proposed _____

[] Pole/Pad # _____ [] Temporary [] Other _____

Building Occupied as _____ Utility Co. _____

Est. Cost of Elec. Work \$ 3,960.00

JOB SUMMARY (Office Use Only)

PLAN REVIEW

[] No Plans Required

[] Partial - Underslab Utilities Approved

Date 6-11-13 Approved by: CS

[] Electric Plans Approved

Date: _____ Approved by: _____

Joint Plan Review Required:

[] Bldg. [] Plumb. [] Fire. [] Elev.

SUBCODE APPROVAL for PERMIT

Date: 6-11-13

Approved by: JS

SUBCODE APPROVAL for CERTIFICATE

[] CO [] CCO [] CA

Date: 9/11/14

Approved by: _____

INSPECTIONS

Dates (Month/Day)

Type: _____ Failure _____ Approval _____ Initial _____

Rough _____

Barrier-Free _____

Trench _____

Temp. Serv. _____

Constr. Serv. _____

TCO _____

Other _____

Service _____

Final _____

Barrier-Free _____

Temp. Cut-in-Card Date Issued _____

Final Cut-in-Card Date Issued _____

Annual Pool Inspection _____

Date of Grounding and Bonding _____

Certification _____

C. CERTIFICATION IN LIEU OF OATH

I hereby certify that I am the (agent of) owner of record and am authorized to make this application and perform the work listed on this application.

Applicant sign/Contractor sign and seal here:

Daniel J. Neary

D. TECHNICAL SITE DATA

Print name here: _____

[X] Licensed Elec. Contractor [] Certif'd Landscape Irrigation Contr. [] Exempt Applicant

DESCRIPTION OF WORK:

QTY. SIZE

ITEMS

Lighting Fixtures

Receptacles

Switches

Detectors

Light Poles

Motors—Fract. HP

Emergency & Exit Lights

Communications Points

Alarm Devices/F.A.C. Panel

TOTAL NUMBERS

Pool Permit/with UW Lights

Storable Pool/Spa/Hot Tub

KW Elec. Range/Receptacle

KW Oven/Surface Unit

KW Elec. Water Heater

KW Elec. Dryer/Receptacle

KW Dishwasher

HP Garbage Disposal

KW Central A/C Unit

~~KW Baseboard Heat~~

HP Motors 1/4 HP

KW Transformer/Generator

AMP Service

AMP Subpanels

AMP Motor Control Center

KW Elec. Sign/Outline Light

Administrative Surcharge \$ _____

Minimum Fee \$ _____

State Permit Surcharge Fee \$ _____

TOTAL FEE \$ _____

To reorder call: ALLEGRA

Marketing • Print • Mail

(609) 390-1400

Date Received

Control #

Date Issued

Permit #

7/16/14

14-2251



PLUMBING SUBCODE TECHNICAL SECTION



A. IDENTIFICATION—APPLICANT: COMPLETE ALL APPLICABLE INFORMATION. WHEN CHANGING CONTRACTORS, NOTIFY THIS OFFICE. CALL UTILITY DIG NO: 1-800-272-1000.

Block 821 Lot 7 Qualification Code

Work Site Location 1606 W Princeton Ave Brick

Owner in Fee: Bruce Garcia

Tel. () e-mail

Address street municipality zip code

Contractor: NJR HOME SERVICES Tel. (732) 919-8090

Address 1415 WYCKOFF ROAD e-mail WALL, NJ 07719

Contractor License No. Exp. Date

Home Improvement Contractor Registration No. or Exemption Reason (if applicable): 13VH00361500
Federal Emp. ID No. 22-3609806 FAX: (732) 938-3010

B. PLUMBING CHARACTERISTICS

Use Group Present X Proposed
Building Sewer Size Public Sewer Private Septic
Water Service Size Public Water Private Well
Est. Cost of Plumbing Work \$ 3,960.00

JOB SUMMARY (Office Use Only)

PLAN REVIEW		INSPECTIONS		Dates (Month/Day)	
		Failure	Failure	Approval	Initial
☐ No Plans Required	Type: Slab				
☐ Partial-Under-slab Utilities Approved	Rough				
Date: 6/13/13 Approved by: [Signature]	Water				
Joint Plan Review Required: [Signature]	Sewer				
☐ Bldg. ☐ Elec. ☐ Fire. ☐ Elev.	Fixtures				
SUBCODE APPROVAL for PERMIT		Gas Equipment			
Date: 6/13/13	Approved by: PA	Gas Piping			
SUBCODE APPROVAL for CERTIFICATE		LP Gas Tank			
☐ CO ☐ CCO ☐ CA	Approved by: PA	Fuel Oil Piping			
Date: 9-11-13	Approved by: [Signature]	Solar			
		TCO			
		Final			

C. CERTIFICATION IN LIEU OF OATH

I hereby certify that I am the (agent of) owner of record and am authorized to make this application and perform the work listed on this application.

Applicant sign/Contractor sign and seal here: [Signature]

Print name here: [Signature]

D. TECHNICAL SITE DATA

DESCRIPTION OF WORK

DIRECT REPLACEMENT OF CENTRAL AC

QTY.

FIXTURE/EQUIPMENT

Water Closet

Urinal/Bidet

Bath Tub

Lavatory

Shower

Floor Drain

Sink

Dishwasher

Drinking Fountain

Washing Machine

Hose Bibb

Water Heater

Fuel Oil Piping

Gas Piping

LP Gas Tank

Steam Boiler

Hot Water Boiler

Sewer Pump

Interceptor/Separator

Backflow Preventer

Greasetrap

Sewer Connection

Water Service Connection

Stacks

Other Central AC 3 ton

Date Received Control #

Date Issued Permit #

7/16/14
14-2251

FEE (Office Use Only)

Administrative Surcharge \$
Minimum Fee \$
State Permit Surcharge Fee \$
TOTAL FEE \$



CONSTRUCTION PERMIT

Date Issued 7/16/14
Control # C-13-003353
Permit # _____

14-2251

IDENTIFICATION Block: 821 Lot: 7 Qualifier _____
Work Site Location: 1606 W. PRINCETON AVE. Brick Township, NJ Contractor: NJR HOME SERVICES
Owner in Fee: GARCIA, BRUCE & MAUREEN Address: 1415 WYCKOFF ROAD WALL NJ 07719
1606 W PRINCETON AVE BRICK NJ 08724 Telephone: (732) 919-8172
Telephone: _____ Lic. No. or Bldrs. Reg. No. 16095
Federal Employee No. 22-3609806

Is hereby granted permission to perform the following work:

- ☐ BUILDING ☒ PLUMBING ☐ LEAD HAZARD ABATEMENT
☒ ELECTRICAL ☐ FIRE PROTECTION ☐ DEMOLITION
☐ ELEVATOR DEVICES ☐ ASBESTOS ABATEMENT (Subchapter 8 only) ☐ OTHER

DESCRIPTION OF WORK:

REPLACEMENT A/C

Note: If construction does not commence within one (1) year of date of issuance, or if construction ceases for a period of six (6) months, this permit is void.

Estimated Cost of Work \$7,920

Daniel Newman Jr
Construction Official

6/12/13
Date

U.C.C. F170
equiv (rev 1/04)

1 WHITE - INSPECTOR

2 CANARY - OFFICE

3 PINK - TAX ASSESSOR

4 GOLD - APPLICANT

PAYMENTS (Office Use Only)

Building	\$0
Electrical	\$40
Plumbing	\$50
Fire Protection	\$0
Elevator Devices	\$0
Other	\$0.00
DCA Training Fee	\$14
CO Fee	
Other	\$0
Total	\$104
Check No. <u>31156</u>	
Cash	\$0
Credit	\$0
Collected By	

REQUIRED INSPECTIONS

Construction work must be inspected in accordance with the State Uniform Construction Code Regulations N.J.A.C. 5:23-2.18. This agency will carry out such periodic inspections during the progress of work as are necessary to insure that the work installed conforms with the requirements of the Uniform Construction Code.

The owner or other responsible person in charge of work must notify this agency when work is ready for any required inspections specified below. Requests for inspections must be made at least 24 hours prior to the time the inspection is desired. Inspections will be performed within three business days of the time for which they are requested. The work must not proceed in a manner which will preclude the inspection until it has been made and approval granted.

- ☒ Required inspections for all subcodes for one- and two-family dwellings are as follows:

- The bottom of footing trenches before placement of footings, except that in cases of pile foundations, inspections shall be made in accordance with the requirements of the building subcode.
- Foundations and all walls up to grade level prior to back filling.
- All structural framing, connections, wall and roof sheathing and insulation; electrical rough wiring, panel and service installation, rough plumbing. The framing inspection shall take place after the rough electrical and plumbing inspections and after the installation of the heating, ventilation and/or air conditioning duct system. The insulation inspection shall be performed after all other subcode rough inspections and prior to the installation of any interior finish material.
- Installation of all finished materials, sealings of exterior joints, plumbing piping, trim and fixtures; electrical wiring devices and fixtures; mechanical systems equipment.

07/16/14 2:15 PM 00155044024
ELECTRIC \$40.00
PLUMBING \$50.00
DCA \$14.00
TOTAL \$104.00

Additional required inspections for all subcodes of construction, for other than one- and two-family dwellings, are fire suppression systems, lead producing devices and Barrier Free subcode accessibility, if applicable.

- ☐ Required special inspections. The applicant by accepting the permit will be deemed to have consented to these requirements:

- ☒ A final inspection is required for each applicable subcode area before a final Certificate of Occupancy or Approval may be issued. The final inspections include the installation of all interior and exterior finish materials, sealing of exterior joints, mechanical system and other required equipment; electrical wiring, devices and fixtures; plumbing pipes, trim and fixtures; tests required by any provision of the adopted subcodes, Barrier Free accessibility, if applicable; and verification of compliance with NJAC 5:23-3.5, "Posting structures".

- ☐ A complete copy of released plans must be kept on the job site.

If you do not understand any of this information, please ask.



Lot - 7
Block-821

New Unit-
☐ BTU's- 36K

Old Unit-
☐ BTU's-36K

Thank you
Carrie

THIS DOCUMENT IS PRINTED ON WATERMARKED PAPER WITH A MULTI-COLORED
BACKGROUND AND MULTIPLE SECURITY FEATURES. PLEASE VERIFY AUTHENTICITY.

NOT AN
ELECTRICIAN'S
OR PLUMBER'S
LICENSE

State Of New Jersey
New Jersey Office of the Attorney General
Division of Consumer Affairs

THIS IS TO CERTIFY THAT THE
Division of Consumer Affairs

HAS REGISTERED

NJR Home Services Company
Joseph Marazzo
1415 Wyckoff Road
Wall NJ 07719

FOR PRACTICE IN NEW JERSEY AS A(N): Home Improvement Contractor

11/10/2011 TO 12/31/2012
VALID

13VH00361500

LICENSE/REGISTRATION/CERTIFICATION #

Signature of Licensee/Registrant/Certificate Holder


DIRECTOR



Split System Cooling Product Data

XR15 4TTR5

1 1/2 - 5 Tons (018E - 061E)

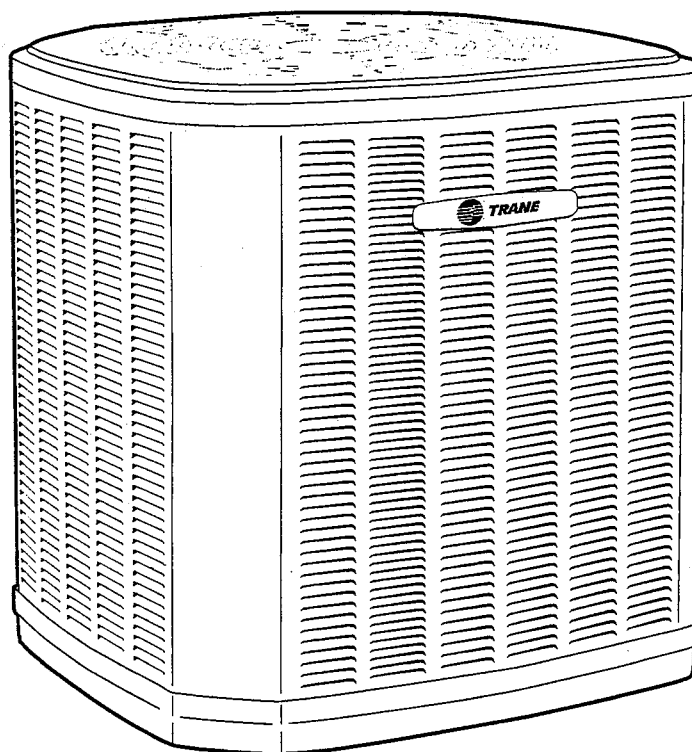

PUB. NO. 22-1831-06



Features and Benefits

- **CLIMATUFF®** compressor
- Efficiency up to **17.0 SEER**
- All aluminum **SPINE FIN™** coil
- **WEATHERGUARD™** fasteners
- **QUICK-SESS™** cabinet, service access and refrigerant connections with full coil protection
- **DURATUFF™** base, fast complete drain, weatherproof
- **COMFORT-R™** mode approved
- Glossy corrosion resistant finish
- Internal compressor high/low pressure & temperature protection
- 018, 024, 030 & 060 ship with start kit
- Liquid line filter/drier
- Tarpaulin gray cabinet with anthracite gray badge and cap
- High pressure switch
- Service valve cover
- R-410A refrigerant
- S.E.E.T. design testing
- 100% line run test
- Low ambient cooling to 30°F with AY28X079
- Low ambient cooling to 55°F as shipped
- **Extended warranties available**



Contents

Features and Benefits	<u>2</u>
General Data	<u>4</u>
Product Specifications	<u>4</u>
A-weighted Sound Power Level [dB(A)]	<u>4</u>
Accessory Description and Usage	<u>6</u>
AHRI Standard Capacity Rating Conditions	<u>6</u>
Model Nomenclature	<u>7</u>
Electrical Data	<u>8</u>
Dimensions	<u>15</u>
Mechanical Specification Options	<u>16</u>



General Data

Product Specifications

Model No. ①	4TTR5018E1	4TTR5024E1	4TTR5030E1	4TTR5036E1
Electrical Data V/Ph/Hz ②	208/230/1/60	208/230/1/60	208/230/1/60	208/230/1/60
Min Cir Ampacity	9	9	12	19
Max Fuse Size (Amps)	15	15	20	30
Compressors	CLIMATUFF®	CLIMATUFF®	CLIMATUFF®	CLIMATUFF® · SCROLL
No. Used - No. Stages	1-1	1-1	1-1	1-1
RL AMPS - LR AMPS	6.4 - 38.6	6.8 - 38.6	9.1 - 57.8	14.1 - 77
Outdoor Fan FL Amps	0.74	0.74	0.93	0.93
Fan HP	1/8	1/8	1/5	1/5
Fan Dia (inches)	23	23	27.6	27.6
Coil	Spine Fin™	Spine Fin™	Spine Fin™	Spine Fin™
Refrigerant R-410A	5/2-LB/OZ	6/3-LB/OZ	7/0-LB/OZ	7/4-LB/OZ
Line Size - (in.) O.D. Gas ③	5/8	3/4	3/4	3/4
Line Size - (in.) O.D. Liquid ③	3/8	3/8	3/8	3/8
Dimensions H x W x D (Crated)	34 x 30.1 x 33	34 x 30.1 x 33	38.4 x 35.1 x 38.7	42.4 x 35.1 x 38.7
Weight - Shipping	200	201	234	228
Weight - Net	173	174	201	193
Start Components	YES	YES	YES	NO
Sound Enclosure	YES	YES	YES	YES
Compressor Sump Heat	NO	NO	NO	NO
Optional Accessories: ④				
Anti-short Cycle Timer	TAYASCT501A	TAYASCT501A	TAYASCT501A	TAYASCT501A
Evaporator Defrost Control A/C	AY28X079	AY28X079	AY28X079	AY28X079
Rubber Isolator Kit	BAYISLT101	BAYISLT101	BAYISLT101	BAYISLT101
Crank Case Heater Kit	BAYCCHT300	BAYCCHT300	BAYCCHT300	BAYCCHT302
Hard Start Kit Scroll				BAYKSKT260
Extreme Condition Mounting Kit	BAYECMT023	BAYECMT023	BAYECMT004	BAYECMT004
Snow Leg - Base & Cap 4" High	BAYLEGS002	BAYLEGS002	BAYLEGS002	BAYLEGS002
Snow Leg - 4" Extension	BAYLEGS003	BAYLEGS003	BAYLEGS003	BAYLEGS003
Seacoast Kit	BAYSEAC001	BAYSEAC001	BAYSEAC001	BAYSEAC001
Refrigerant Lineset ⑤	TAYREFLN950	TAYREFLN7*	TAYREFLN7*	TAYREFLN7*

① Certified in accordance with the Air-Source Unitary Heat Pump Equipment certification program which is based on AHRI Standard 210/240.

② Calculated in accordance with N.E.C. Only use HACR circuit breakers or fuses.

③ Standard line lengths - 80' Standard lift - 60' Suction and Liquid line.

For Greater lengths and lifts refer to refrigerant piping software Pub# 32-3312-01. (*denotes latest revision)

④ For accessory description and usage, see page 5.

⑤ * = 15, 20, 25, 30, 40 and 50 foot lineset available.

A-weighted Sound Power Level [dB(A)]

MODEL	SOUND POWER LEVEL [dB(A)]	A-WEIGHTED FULL OCTAVE SOUND POWER LEVEL dB - [dB(A)] High Stage							
		63	125	250	500	1000	2000	4000	8000
4TTR5018E	75	24.9	44.9	56.7	71.1	74.1	72.7	62.2	49.9
4TTR5024E	75	23	45.4	57	70.9	74.2	70.5	62.9	52.6
4TTR5030E	75	27.9	52.9	62.9	74.3	76.2	73	64.7	52.5
4TTR5036E	75	23.2	51.7	64.2	72.3	74.1	71.3	62.7	49.5
4TTR5042E	75	22.8	52.8	65.6	73.3	75.1	71.5	62.8	50
4TTR5048E	75	22.8	52.8	65.6	73.3	75.1	71.5	62.8	50
4TTR5049E	74	43.8	53.6	56.8	60.9	61.9	57.2	50.4	40.7
4TTR5060E	75	22.8	52.8	65.6	73.3	75.1	71.5	62.8	50
4TTR5061E	75	41.8	53.8	58	64.3	64.2	57.5	54	47.1

Note: Rated in accordance with AHRI Standard 270-2008.



General Data

Product Specifications

Model No. ①	4TTR5042E1	4TTR5048E1	4TTR5049E1	4TTR5060E1	4TTR5061E
Electrical Data V/Ph/Hz ②	208/230/1/60	208/230/1/60	208/230/1/60	208/230/1/60	230/1/60
Min Cir Ampacity	23	26	28	34	39
Max Fuse Size (Amps)	40	45	45	60	60
Compressors	CLIMATUFF® · SCROLL	CLIMATUFF® · SCROLL	CLIMATUFF® · SCROLL	CLIMATUFF® · SCROLL	CLIMATUFF® · SCROLL
No. Used - No. Stages	1-1	1-1	1-1	1-1	1-2
RL AMPS - LR AMPS	17.9 - 112	19.9 - 109	19.9 - 109	26.4 - 134	28.8 - 152.9
Outdoor Fan FL Amps	0.93	0.93	2.80	0.93	2.80
Fan HP	1/5	1/5	1/3	1/5	1/3
Fan Dia (inches)	27.6	27.6	27.6	27.6	27.6
Coil	Spine Fin™	Spine Fin™	Spine Fin™	Spine Fin™	Spine Fin™
Refrigerant R-410A	8/4-LB/OZ	8/5-LB/OZ	11/9-LB/OZ	8/8-LB/OZ	12/9-LB/OZ
Line Size - (in.) O.D. Gas ③	7/8	7/8	7/8	7/8	1-1/8
Line Size - (in.) O.D. Liquid ③	3/8	3/8	3/8	3/8	3/8
Dimensions H x W x D (Crated)	46.4 x 35.1 x 38.7	51 x 35.1 x 38.7	51 x 35.1 x 38.7	51 x 35.1 x 38.7	51 x 35.1 x 38.7
Weight - Shipping	272	282	304	285	312
Weight - Net	235	245	267	248	275
Start Components	NO	NO	NO	YES	NO
Sound Enclosure	YES	YES	NO	YES	NO
Compressor Sump Heat	NO	NO	NO	NO	NO
Optional Accessories: ④					
Anti-short Cycle Timer	TAYASCT501A	TAYASCT501A	TAYASCT501A	TAYASCT501A	TAYASCT501A
Evaporator Defrost Control A/C	AY28X079	AY28X079	AY28X079	AY28X079	AY28X079
Rubber Isolator Kit	BAYISLT101	BAYISLT101	BAYISLT101	BAYISLT101	BAYISLT101
Crank Case Heater Kit	BAYCCHT301	BAYCCHT301	BAYCCHT301	BAYCCHT301	BAYCCHT301
Hard Start Kit Scroll	BAYKSKT260	BAYKSKT260	BAYKSKT260		
Extreme Condition Mounting Kit	BAYECMT004	BAYECMT004	BAYECMT004	BAYECMT004	BAYECMT004
Snow Leg - Base & Cap 4" High	BAYLEGS002	BAYLEGS002	BAYLEGS002	BAYLEGS002	BAYLEGS002
Snow Leg - 4" Extension	BAYLEGS003	BAYLEGS003	BAYLEGS003	BAYLEGS003	BAYLEGS003
Seacoast Kit	BAYSEAC001	BAYSEAC001	BAYSEAC001	BAYSEAC001	BAYSEAC001
Refrigerant Lineset ⑤	TAYREFLN3*	TAYREFLN3*	TAYREFLN3*	TAYREFLN3*	TAYREFLN*4

① Certified in accordance with the Air-Source Unitary Heat Pump Equipment certification program which is based on AHRI Standard 210/240.

② Calculated in accordance with N.E.C. Only use HACR circuit breakers or fuses.

③ Standard line lengths - 60'. Standard lift - 60' Suction and Liquid line. For 061 units, Max. linear length 60 ft.; Max. lift - Suction 25 ft.; Max lift - Liquid 25 ft.

For Greater lengths and lifts refer to refrigerant piping software Pub# 32-3312-01. (*denotes latest revision)

④ For accessory description and usage, see page 5.

⑤ * = 15, 20, 25, 30, 40 and 50 foot lineset available.



General Data

Accessory Description and Usage

Anti-Short Cycle Timer — Solid state timing device that prevents compressor recycling until 5 minutes have elapsed after satisfying call or power interruptions. Use in area with questionable power delivery, commercial applications, long lineset, etc.

Evaporator Defrost Control — SPST Temperature actuated switch that cycles the condenser off as indoor coil reaches freeze-up conditions. Used for low ambient cooling to 30°F with TXV.

Rubber Isolators — 5 large rubber donuts to isolate condensing unit from transmitting energy into mounting frame or pad. Use on any application where sound transmission needs to be minimized.

Hard Start kit — Start capacitor and relay to assist compressor motor startup. Use in areas with marginal power supply, on long linesets, low ambient conditions, etc.

Extreme Condition Mount Kit — Bracket kits to securely mount condensing unit to a frame or pad without removing any panels. Use in areas with high winds, or on commercial roof tops, etc.

AHRI Standard Capacity Rating Conditions

AHRI STANDARD 210/240 RATING CONDITIONS —

(A) Cooling 80°F DB, 67°F WB air entering indoor coil, 95°F DB air entering outdoor coil.

AHRI STANDARD 270 RATING CONDITIONS — (Noise rating numbers are determined with the unit in cooling operation.) Standard Noise Rating number is at 95°F outdoor air.





Model Nomenclature

Outdoor Units

Refrigerant Type
2 = R-22
4 = R-410A

TRANE

Product Type
W = Split Heat Pump
T = Split Cooling

Product Family
Z = Leadership - Two Stage
X = Leadership
R = Replacement/Retail
B = Basic
A = Light Commercial

Family SEER
0 = 10 3 = 13 6 = 16
1 = 11 4 = 14 8 = 18
2 = 12 5 = 15 9 = 19

Split System Connections 1-6 Tons
0 = Brazed

Nominal Capacity in 000s of BTUs

Major Design Modifications

Power Supply
1 = 200-230/1/60 or 208-230/1/60
3 = 200-230/3/60
4 = 460/3/60

Secondary Function

Minor Design Modifications

Unit Parts Identifier

Gas Furnaces

Furnace Configuration
TU = Upflow/Horizontal
TD = Downflow/Horizontal

Type
E = 80% Induced Draft Standard
D = 80% Induced Draft Premium
C = 90% Condensing Standard
X = 90% Condensing Premium
H = 95% Condensing Premium

Number of Heating Stages
1 = Single Stage
2 = Two Stage
3 = Three Stage

Cabinet Width
A = 14.5" Cabinet Width
B = 17.5" Cabinet Width
C = 21.0" Cabinet Width
D = 24.5" Cabinet Width

Heating Input
080 = 80,000 MBTUH

Major Design Change

Voltage
9 = 115 Volts / 60 Hertz / Natural Gas
A = 115 Volts / 50 Hertz / Natural Gas
C = 115 Volts / Natural Gas with Communicating System Control
F = 115 Volts / Natural Gas with Integrated Electronic Filter
D = 115 Volts / Natural Gas with Communicating System Control and Integrated Electronic Filter

Air Capacity for Cooling
36 = 3 Ton Standard PSC Motor
H3 = 3 Ton High Efficiency Motor
V3 = 3 Ton Variable Speed Motor

Draft Inducer Speeds
1 = Single Speed
2 = Two Speed
V = Variable Speed

Minor Design Change

Service Digit - Not Orderable

Air Handlers - Residential

Refrigerant Type
4 = R-410A

Application
TE = Fully Convertible
TG = Semi Convertible
TF = Front Return

Product Family
E = Leadership - Variable Speed
P = Leadership
C = Replacement/Retail
B = Basic

Flow Control
0 = No Flow Control
3 = Nonbleed TXV

Feature Identifier
0 = Standard Unit
F = Air-Tite™

Nominal Capacity in 1000's (BTUH)

Major Design Change

Power Supply
1 = Single Phase

Electrical Connection
0 = Pig Tails
B = Circuit Breaker
D = Pull Disconnect

Future Option - Factory Installed Heater Nominal KW Value

Minor Design Modifications

Unit Parts Identifier

NOTE: There will be a phase-in of new model numbers for new air handlers over next 2 years.

Coils - Residential

Refrigerant Type
4 - R410A

Product Family
T-Premium
(Heat Pump or Convertible Coil)

Coil Design
X - Direct Expansion Evaporator Coil

Product Family
C - Cased A Coil
A - Uncased A Coil
F - Cased Horizontal Flat Coil

Coil Width (Cased/Uncased)
A - 14.5" / 13.3"
B - 17.5" / 16.3"
C - 21.0" / 19.8"
D - 24.5" / 23.3"
H - 10.5"

Refrigerant Line Coupling
0 - Brazed

Model Number Distinguisher

Major Design Change

Efficiency
C - Standard
S - Hi Efficiency (Derived from 10 SEER products)

Refrigerant Control
3 - TXV - Non-Bleed

Coil Circuitry
H - Heat Pump

Airflow Configuration
A - Upflow Only
U - Upflow / Downflow
H - Horizontal Only
C - Convertible - Upflow, Downflow, Left or Right Airflow

Minor Design Change


Unit Parts Identifier



Electrical Data

Schematic Diagrams

4TTR5018, 4TTR5024, 4TTR5030

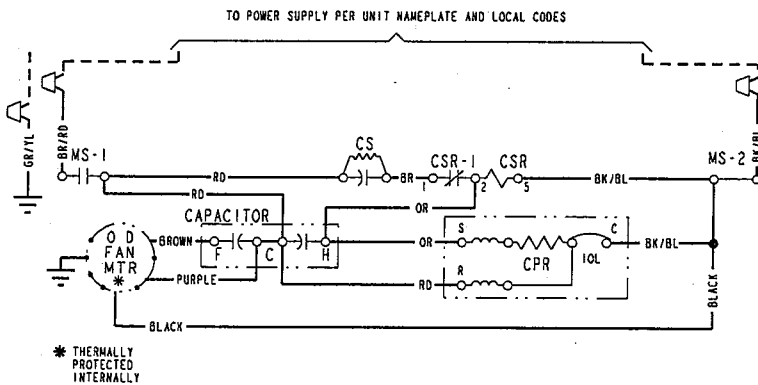

CA	COOLING ANTICIPATOR	LPCO	LOW PRESSURE CUTOFF SW.
CBS	COIL BOTTOM SENSOR	MS	COMPRESSOR MOTOR CONTACTOR
CF	FAN CAPACITOR	ODA	OUTDOOR ANTICIPATOR
CN	WIRE CONNECTOR	ODT	OUTDOOR FAN THERMOSTAT
CPR	COMPRESSOR	ODS	OUTDOOR TEMPERATURE SENSOR
CR	RUN CAPACITOR	ODT	OUTDOOR THERMOSTAT
CS	STARTING CAPACITOR	RHS	RESISTANCE HEAT SWITCH
CSR	CAPACITOR SWITCHING RELAY	SC	SWITCHOVER VALVE SOLENOID
DFC	DEFROST CONTROL	SM	SYSTEM "ON-OFF" SWITCH
F	INDOOR FAN RELAY	TDL	DISCHARGE LINE THERMOSTAT
HA	HEATING ANTICIPATOR	TNS	TRANSFORMER
HPCO	HIGH PRESSURE CUTOFF SW.	TS	HEATING-COOLING THERMOSTAT
IOL	INTERNAL OVERLOAD PROTECTOR	TSH	HEATING THERMOSTAT

⚠ WARNING
HAZARDOUS VOLTAGE!
DISCONNECT ALL ELECTRIC POWER
INCLUDING REMOTE DISCONNECTS
BEFORE SERVICING.
FAILURE TO DISCONNECT POWER
BEFORE SERVICING CAN CAUSE
SEVERE PERSONAL INJURY OR DEATH!


⚠ CAUTION
USE COPPER CONDUCTORS ONLY!
UNIT TERMINALS ARE NOT DESIGNED
TO ACCEPT OTHER TYPES OF
CONDUCTORS.
FAILURE TO DO SO MAY CAUSE
DAMAGE TO THE EQUIPMENT!

COLOR OF WIRE	
BK/BL	BLACK WIRE WITH BLUE MARKER
COLOR OF MARKER	
BK	BLACK
BL	BLUE
BR	BROWN
OR	ORANGE
RD	RED
WH	WHITE
YL	YELLOW
GR	GREEN
PR	PURPLE

NOTES:

- IF ODT-B IS NOT USED, ADD JUMPER BETWEEN W2 & W3 AT AIR HANDLER.
IF USED, ODT-B MUST BE MOUNTED REMOTE OF CONTROL BOX IN AN APPROVED WEATHER PROOF ENCLOSURE.
- IF ODT-A IS NOT USED, ADD JUMPER BETWEEN W1 & W2 AT AIR HANDLER.
- LOW VOLTAGE (24 V.) FIELD WIRING MUST BE 18 AWG MIN.

FOR CANADIAN INSTALLATIONS
POUR INSTALLATIONS CANADIENNES
**CAUTION: NOT SUITABLE FOR USE ON
SYSTEMS EXCEEDING 150V-TO-GROUND.
ATTENTION: NE CONVIENT PAS AUX
INSTALLATIONS DE PLUS DE 150 V A
LA TERRE.**

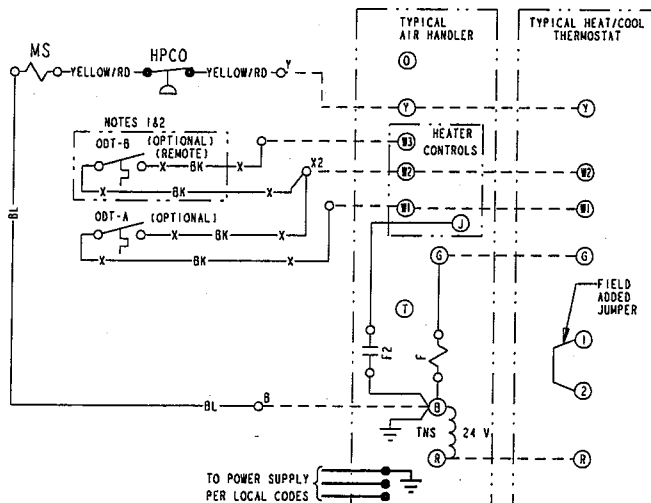




Electrical Data

Schematic Diagrams

4TTR5036

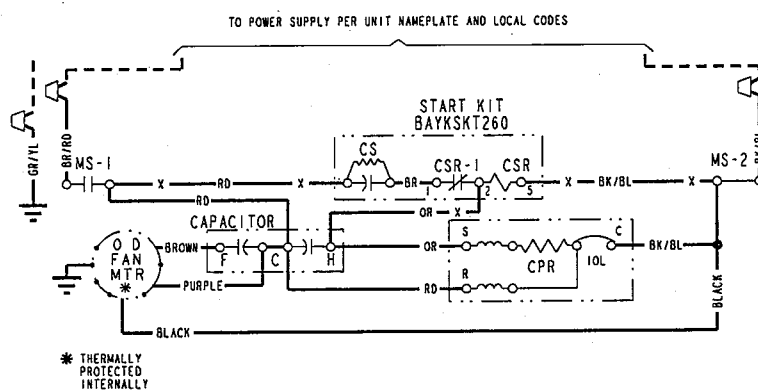

CA	COOLING ANTICIPATOR	LPCO	LOW PRESSURE CUTOFF SW.
CBS	COIL BOTTOM SENSOR	MS	COMPRESSOR MOTOR CONTACTOR
CF	FAN CAPACITOR	ODA	OUTDOOR ANTICIPATOR
CH	WIRE CONNECTOR	ODT	OUTDOOR FAN THERMOSTAT
CPR	COMPRESSOR	ODS	OUTDOOR TEMPERATURE SENSOR
CR	RUN CAPACITOR	ODT	OUTDOOR THERMOSTAT
CS	STARTING CAPACITOR	RHS	RESISTANCE HEAT SWITCH
CSR	CAPACITOR SWITCHING RELAY	SC	SWITCHOVER VALVE SOLENOID
DFC	DEFROST CONTROL	SW	SYSTEM "ON-OFF" SWITCH
F	INDOOR FAN RELAY	TDL	DISCHARGE LINE THERMOSTAT
HA	HEATING ANTICIPATOR	TNS	TRANSFORMER
HPCO	HIGH PRESSURE CUTOFF SW.	TS	HEATING-COOLING THERMOSTAT
IOL	INTERNAL OVERLOAD PROTECTOR	TSH	HEATING THERMOSTAT
ACR	A/C RECTIFIER	R	ODT SHUNT RESISTOR

⚠ WARNING HAZARDOUS VOLTAGE! DISCONNECT ALL ELECTRIC POWER INCLUDING REMOTE DISCONNECTS BEFORE SERVICING. FAILURE TO DISCONNECT POWER BEFORE SERVICING CAN CAUSE SEVERE PERSONAL INJURY OR DEATH!	⚠ CAUTION USE COPPER CONDUCTORS ONLY! UNIT TERMINALS ARE NOT DESIGNED TO ACCEPT OTHER TYPES OF CONDUCTORS. FAILURE TO DO SO MAY CAUSE DAMAGE TO THE EQUIPMENT!
---	--


COLOR OF WIRE					
BK/BL BLACK WIRE WITH BLUE MARKER					
COLOR OF MARKER					
BK	BLACK	OR	ORANGE	YL	YELLOW
BL	BLUE	RD	RED	GR	GREEN
BR	BROWN	WH	WHITE	PR	PURPLE

NOTES:

1. IF ODT-B IS NOT USED, ADD JUMPER BETWEEN W2 & W3 AT AIR HANDLER.
IF USED, ODT-B MUST BE MOUNTED REMOTE OF CONTROL BOX IN AN APPROVED WEATHER PROOF ENCLOSURE.
2. IF ODT-A IS NOT USED, ADD JUMPER BETWEEN W1 & W2 AT AIR HANDLER.
3. LOW VOLTAGE (24 V.) FIELD WIRING MUST BE 18 AWG MIN.

FOR CANADIAN INSTALLATIONS POUR INSTALLATIONS CANADIENNES

CAUTION: NOT SUITABLE FOR USE ON SYSTEMS EXCEEDING 150V-TO-GROUND.
ATTENTION: NE CONVIENT PAS AUX INSTALLATIONS DE PLUS DE 150 V A LA TERRE.

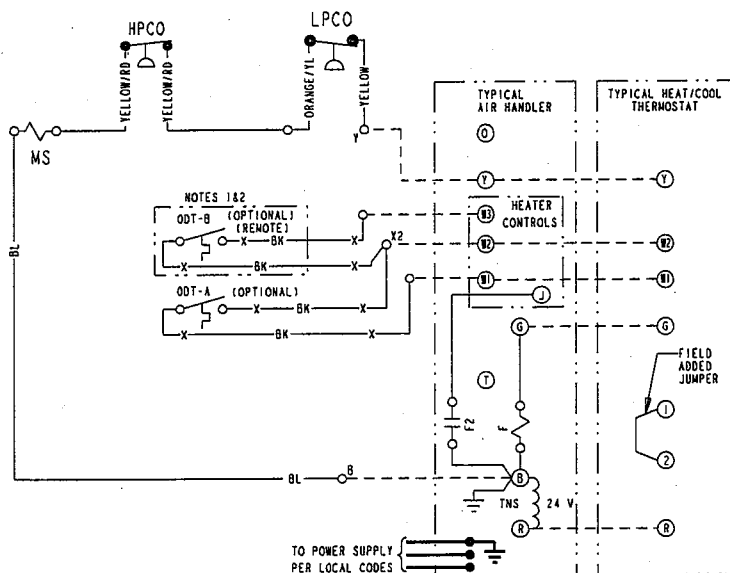




Electrical Data

Schematic Diagrams

4TTR5042

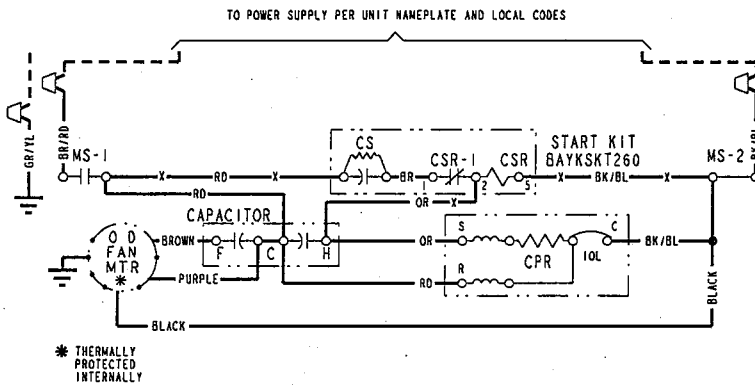

CA	COOLING ANTICIPATOR	LPCO	LOW PRESSURE CUTOFF SW.
CBS	COIL BOTTOM SENSOR	MS	COMPRESSOR MOTOR CONTACTOR
CF	FAN CAPACITOR	ODA	OUTDOOR ANTICIPATOR
CW	WIRE CONNECTOR	OFT	OUTDOOR FAN THERMOSTAT
CPR	COMPRESSOR	ODS	OUTDOOR TEMPERATURE SENSOR
CR	RUN CAPACITOR	ODT	OUTDOOR THERMOSTAT
CS	STARTING CAPACITOR	RHS	RESISTANCE HEAT SWITCH
CSR	CAPACITOR SWITCHING RELAY	SC	SWITCHOVER VALVE SOLENOID
DFC	DEFROST CONTROL	SW	SYSTEM "ON-OFF" SWITCH
F	INDOOR FAN RELAY	TOL	DISCHARGE LINE THERMOSTAT
HA	HEATING ANTICIPATOR	TNS	TRANSFORMER
HPCO	HIGH PRESSURE CUTOFF SW.	TS	HEATING-COOLING THERMOSTAT
IOL	INTERNAL OVERLOAD PROTECTOR	TSH	HEATING THERMOSTAT
ACR	A/C RECTIFIER	R	OFT SHUNT RESISTOR

⚠ WARNING
HAZARDOUS VOLTAGE!
DISCONNECT ALL ELECTRIC POWER INCLUDING REMOTE DISCONNECTS BEFORE SERVICING.
FAILURE TO DISCONNECT POWER BEFORE SERVICING CAN CAUSE SEVERE PERSONAL INJURY OR DEATH!

⚠ CAUTION
USE COPPER CONDUCTORS ONLY!
UNIT TERMINALS ARE NOT DESIGNED TO ACCEPT OTHER TYPES OF CONDUCTORS.
FAILURE TO DO SO MAY CAUSE DAMAGE TO THE EQUIPMENT!


COLOR OF WIRE			
BK/BL	BLACK WIRE WITH BLUE MARKER		
COLOR OF MARKER			
BK	BLACK	OR	ORANGE
BL	BLUE	RD	RED
BR	BROWN	WH	WHITE
		GR	GREEN
		PR	PURPLE
		YL	YELLOW

NOTES:

1. IF ODT-B IS NOT USED, ADD JUMPER BETWEEN W2 & W3 AT AIR HANDLER.
IF USED, ODT-B MUST BE MOUNTED REMOTE OF CONTROL BOX IN AN APPROVED WEATHER PROOF ENCLOSURE.
2. IF ODT-A IS NOT USED, ADD JUMPER BETWEEN W1 & W2 AT AIR HANDLER.
3. LOW VOLTAGE (24 V.) FIELD WIRING MUST BE 18 AWG MIN.

FOR CANADIAN INSTALLATIONS
POUR INSTALLATIONS CANADIENNES

CAUTION: NOT SUITABLE FOR USE ON SYSTEMS EXCEEDING 150V-TO-GROUND.
ATTENTION: NE CONVIENT PAS AUX INSTALLATIONS DE PLUS DE 150 V A LA TERRE.

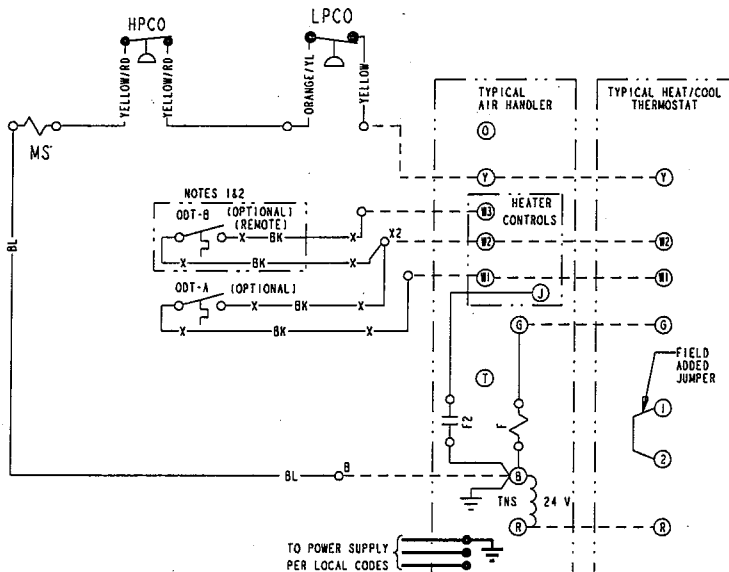




Electrical Data

Schematic Diagrams

4TTR5048

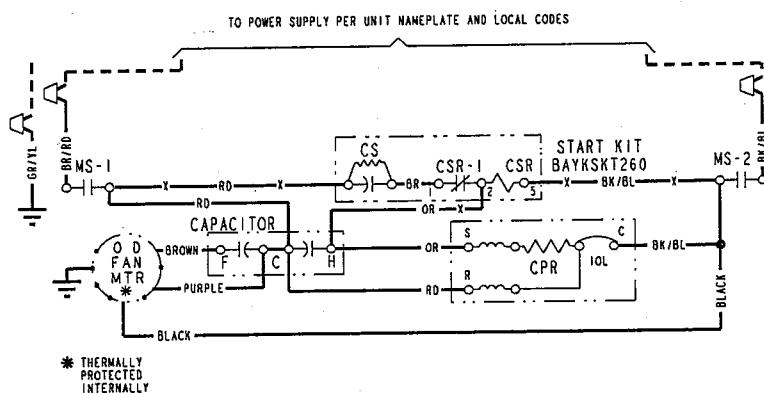

CA	COOLING ANTICIPATOR	LPCO	LOW PRESSURE CUTOUT SW.
CBS	COIL BOTTOM SENSOR	MS	COMPRESSOR MOTOR CONTACTOR
CF	FAN CAPACITOR	ODA	OUTDOOR ANTICIPATOR
CN	WIRE CONNECTOR	ODT	OUTDOOR FAN THERMOSTAT
CPR	COMPRESSOR	ODS	OUTDOOR TEMPERATURE SENSOR
CR	RUN CAPACITOR	ODT	OUTDOOR THERMOSTAT
CS	STARTING CAPACITOR	RHS	RESISTANCE HEAT SWITCH
CSR	CAPACITOR SWITCHING RELAY	SC	SWITCHOVER VALVE SOLENOID
DFC	DEFROST CONTROL	SM	SYSTEM "ON-OFF" SWITCH
F	INDOOR FAN RELAY	TDL	DISCHARGE LINE THERMOSTAT
HA	HEATING ANTICIPATOR	TNS	TRANSFORMER
HPCO	HIGH PRESSURE CUTOUT SW.	TS	HEATING-COOLING THERMOSTAT
IOL	INTERNAL OVERLOAD PROTECTOR	TSH	HEATING THERMOSTAT
ACR	A/C RECTIFIER	R	OFT SHUNT RESISTOR

WARNING
HAZARDOUS VOLTAGE!
DISCONNECT ALL ELECTRIC POWER INCLUDING REMOTE DISCONNECTS BEFORE SERVICING.
FAILURE TO DISCONNECT POWER BEFORE SERVICING CAN CAUSE SEVERE PERSONAL INJURY OR DEATH!

CAUTION
USE COPPER CONDUCTORS ONLY!
UNIT TERMINALS ARE NOT DESIGNED TO ACCEPT OTHER TYPES OF CONDUCTORS.
FAILURE TO DO SO MAY CAUSE DAMAGE TO THE EQUIPMENT!


COLOR OF WIRE
BK/BL BLACK WIRE WITH BLUE MARKER
COLOR OF MARKER
BK BLACK OR ORANGE YL YELLOW
BL BLUE RD RED GR GREEN
BR BROWN WH WHITE PR PURPLE

NOTES:

- IF ODT-B IS NOT USED, ADD JUMPER BETWEEN W2 & W3 AT AIR HANDLER.
IF USED, ODT-B MUST BE MOUNTED REMOTE OF CONTROL BOX IN AN APPROVED WEATHER PROOF ENCLOSURE.
- IF ODT-A IS NOT USED, ADD JUMPER BETWEEN W1 & W2 AT AIR HANDLER.
- LOW VOLTAGE (24 V.) FIELD WIRING MUST BE 18 AWG MIN.

FOR CANADIAN INSTALLATIONS
POUR INSTALLATIONS CANADIENNES

CAUTION: NOT SUITABLE FOR USE ON SYSTEMS EXCEEDING 150V-TO-GROUND.
ATTENTION: NE CONVIENT PAS AUX INSTALLATIONS DE PLUS DE 150 V A LA TERRE.

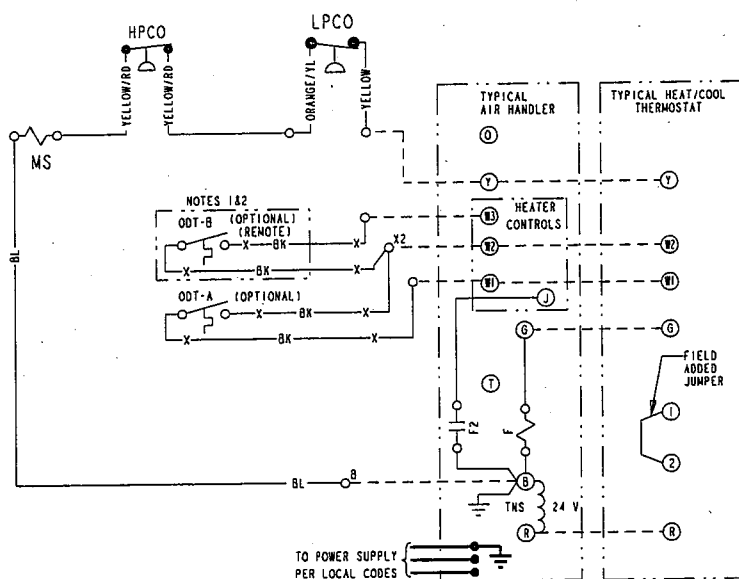



4TTR5049






Electrical Data

Schematic Diagrams


4TTR5060

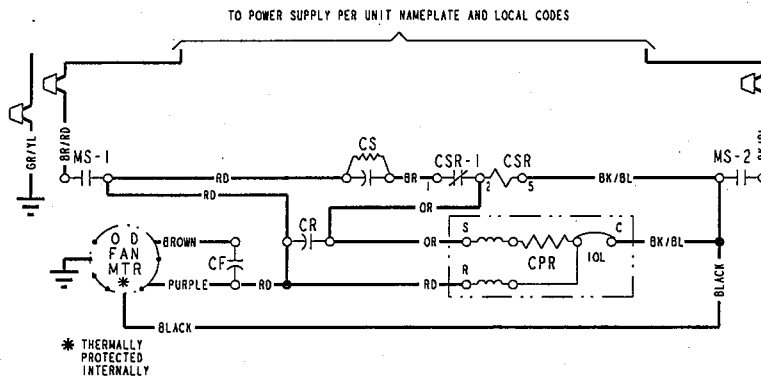

CA	COOLING ANTICIPATOR	LPCO	LOW PRESSURE CUTOFF SW.
CBS	COIL BOTTOM SENSOR	MS	COMPRESSOR MOTOR CONTACTOR
CF	FAN CAPACITOR	ODA	OUTDOOR ANTICIPATOR
CN	WIRE CONNECTOR	ODT	OUTDOOR FAN THERMOSTAT
CPR	COMPRESSOR	ODS	OUTDOOR TEMPERATURE SENSOR
CR	RUN CAPACITOR	OOT	OUTDOOR THERMOSTAT
CS	STARTING CAPACITOR	RHS	RESISTANCE HEAT SWITCH
CSR	CAPACITOR SWITCHING RELAY	SC	SWITCHOVER VALVE SOLENOID
DFC	DEFROST CONTROL	SM	SYSTEM "ON-OFF" SWITCH
F	INDOOR FAN RELAY	TOL	DISCHARGE LINE THERMOSTAT
HA	HEATING ANTICIPATOR	TNS	TRANSFORMER
HPCO	HIGH PRESSURE CUTOFF SW.	TS	HEATING-COOLING THERMOSTAT
IOL	INTERNAL OVERLOAD PROTECTOR	TSH	HEATING THERMOSTAT
ACR	A/C RECTIFIER	R	OFF SHUNT RESISTOR

⚠ WARNING
HAZARDOUS VOLTAGE!
DISCONNECT ALL ELECTRIC POWER INCLUDING REMOTE DISCONNECTS BEFORE SERVICING.
FAILURE TO DISCONNECT POWER BEFORE SERVICING CAN CAUSE SEVERE PERSONAL INJURY OR DEATH!

⚠ CAUTION
USE COPPER CONDUCTORS ONLY!
UNIT TERMINALS ARE NOT DESIGNED TO ACCEPT OTHER TYPES OF CONDUCTORS.
FAILURE TO DO SO MAY CAUSE DAMAGE TO THE EQUIPMENT!

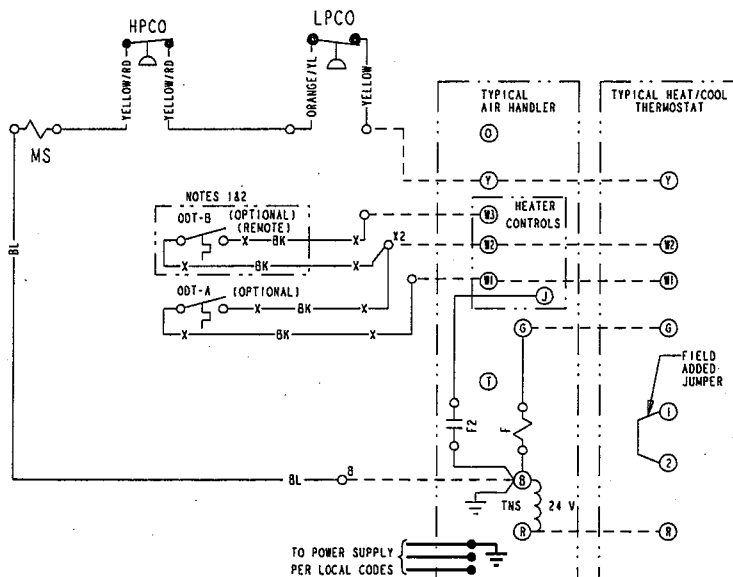

COLOR OF WIRE			
BK/BL	BLACK WIRE WITH BLUE MARKER		
COLOR OF MARKER			
BK	BLACK	OR	ORANGE
BL	BLUE	RD	RED
BR	BROWN	WH	WHITE
		GR	GREEN
		PR	PURPLE
		YL	YELLOW

NOTES:

1. IF ODT-B IS NOT USED, ADD JUMPER BETWEEN W2 & W3 AT AIR HANDLER.
IF USED, ODT-B MUST BE MOUNTED REMOTE OF CONTROL BOX IN AN APPROVED WEATHER PROOF ENCLOSURE.
2. IF ODT-A IS NOT USED, ADD JUMPER BETWEEN W1 & W2 AT AIR HANDLER.
3. LOW VOLTAGE (24 V.) FIELD WIRING MUST BE 18 AWG MIN.


FOR CANADIAN INSTALLATIONS
POUR INSTALLATIONS CANADIENNES
CAUTION: NOT SUITABLE FOR USE ON SYSTEMS EXCEEDING 150V-TO-GROUND.
ATTENTION: NE CONVIENT PAS AUX INSTALLATIONS DE PLUS DE 150 V A LA TERRE.



Electrical Data

Schematic Diagrams

4TTR5061E

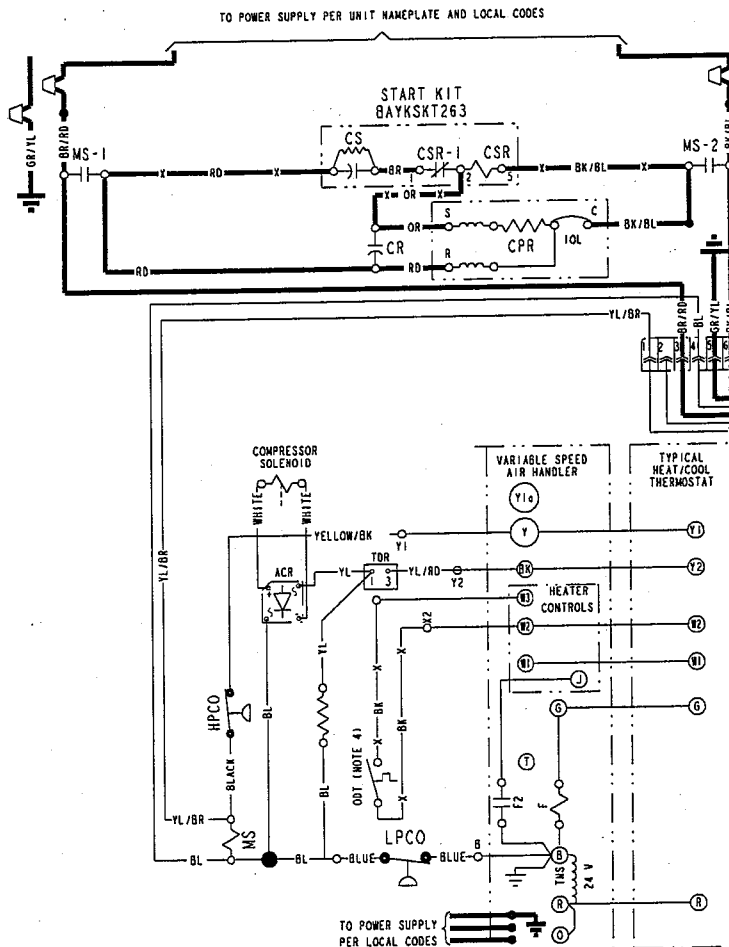

CA	COOLING ANTICIPATOR	LPCO	LOW PRESSURE CUTOFF SW.
CBS	COIL BOTTOM SENSOR	MS	COMPRESSOR MOTOR CONTACTOR
CF	FAN CAPACITOR	ODA	OUTDOOR ANTICIPATOR
CN	WIRE CONNECTOR	OFT	OUTDOOR FAN THERMOSTAT
CPR	COMPRESSOR	ODS	OUTDOOR TEMPERATURE SENSOR
CR	RUN CAPACITOR	ODT	OUTDOOR THERMOSTAT
CS	STARTING CAPACITOR	RHS	RESISTANCE HEAT SWITCH
CSR	CAPACITOR SWITCHING RELAY	SC	SWITCHOVER VALVE SOLENOID
DFC	DEFROST CONTROL	SN	SYSTEM "ON-OFF" SWITCH
F	INDOOR FAN RELAY	TOL	DISCHARGE LINE THERMOSTAT
HA	HEATING ANTICIPATOR	TDR	TIME DELAY RELAY (5 SEC DELAY ON)
HPCO	HIGH PRESSURE CUTOFF SW.	TNS	TRANSFORMER
IOL	INTERNAL OVERLOAD PROTECTOR	TS	HEATING-COOLING THERMOSTAT
ACR	A/C RECTIFIER	TSH	HEATING THERMOSTAT

⚠ WARNING
HAZARDOUS VOLTAGE!
DISCONNECT ALL ELECTRIC POWER
INCLUDING REMOTE DISCONNECTS
BEFORE SERVICING.
FAILURE TO DISCONNECT POWER
BEFORE SERVICING CAN CAUSE
SEVERE PERSONAL INJURY OR DEATH!

⚠ CAUTION
USE COPPER CONDUCTORS ONLY!
UNIT TERMINALS ARE NOT DESIGNED
TO ACCEPT OTHER TYPES OF
CONDUCTORS.
FAILURE TO DO SO MAY CAUSE
DAMAGE TO THE EQUIPMENT!

COLOR OF WIRE		
BK/BL	BLACK WIRE WITH BLUE MARKER	
COLOR OF MARKER		
BK	BLACK	OR ORANGE
BL	BLUE	RD RED
BR	BROWN	WH WHITE
		YL YELLOW
		GR GREEN
		PR PURPLE

NOTES:

1. BE SURE POWER SUPPLY AGREES WITH EQUIPMENT NAMEPLATE.
2. POWER WIRING AND GROUNDING OF EQUIPMENT MUST COMPLY WITH LOCAL CODES.
3. LOW VOLTAGE WIRING TO BE NO. 18 AWG MINIMUM CONDUCTOR.
4. IF OUTDOOR THERMOSTAT (OOT) IS NOT USED, CONNECT W2 TO W3.
5. BE SURE THE JUMPER BETWEEN R AND BK IS CUT OR REMOVED.
6. WITH O AND Y/Y2 ENERGIZED, INDOOR FAN IS AT 80% AIRFLOW.
7. WITH O, Y/Y2 AND BK ENERGIZED, INDOOR FAN IS AT 100% AIRFLOW.


FOR CANADIAN INSTALLATIONS
POUR INSTALLATIONS CANADIENNES

CAUTION: NOT SUITABLE FOR USE ON
SYSTEMS EXCEEDING 150V-TO-GROUND.
ATTENTION: NE CONVIENT PAS AUX
INSTALLATIONS DE PLUS DE 150 V A
LA TERRE.

Dimensions


4TTR5 Outline Drawing

Note: All dimensions are in MM (Inches).

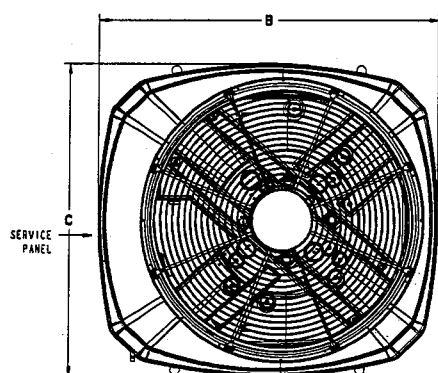

ELECTRICAL AND REFRIGERANT
COMPONENT CLEARANCES
PER PREVAILING CODES.

TOP DISCHARGE AREA SHOULD BE
UNRESTRICTED FOR AT LEAST 1524 (5 FEET)
ABOVE UNIT. UNIT SHOULD BE PLACED SO ROOF
RUN-OFF WATER DOES NOT POUR DIRECTLY ON UNIT,
AND SHOULD BE AT LEAST 305 (12") FROM WALL AND
ALL SURROUNDING SURGERY ON TWO SIDES.
OTHER TWO SIDES UNRESTRICTED.

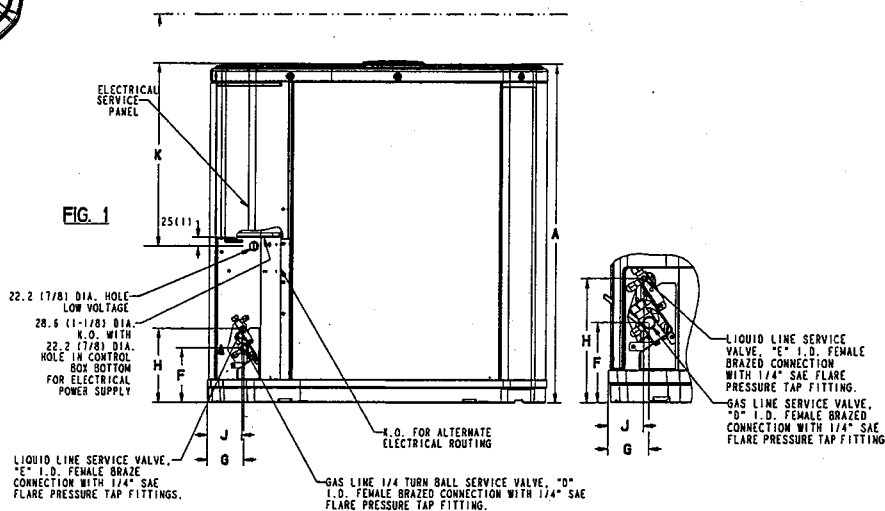

MODELS	BASE	A	B	C	D	E	F	G	H	J	K
4TTR5018E	3	730 (28-3/4)	829 (32-5/8)	756 (29-3/4)	5/8	3/8	127 (5)	76 (3)	197 (7-3/4)	57 (2-1/4)	508 (20)
4TTR5024E	3	730 (28-3/4)	829 (32-5/8)	756 (29-3/4)	3/4	3/8	127 (5)	76 (3)	197 (7-3/4)	57 (2-1/4)	508 (20)
4TTR5030E	4	841 (33-1/8)	946 (37-1/4)	870 (34-1/4)	3/4	3/8	152 (6)	98 (3-7/8)	219 (8-5/8)	86 (3-3/8)	508 (20)
4TTR5036E	4	943 (37-1/8)	946 (37-1/4)	870 (34-1/4)	3/4	3/8	152 (6)	98 (3-7/8)	219 (8-5/8)	86 (3-3/8)	508 (20)
4TTR5042E	4	1045 (41 1/8)	946 (37-1/4)	870 (34-1/4)	7/8	3/8	152 (6)	98 (3-7/8)	219 (8-5/8)	86 (3-3/8)	508 (20)
4TTR5048E	4	1147 (45 1/8)	946 (37-1/4)	870 (34-1/4)	7/8	3/8	152 (6)	98 (3-7/8)	219 (8-5/8)	86 (3-3/8)	508 (20)
4TTR5049E	4	1147 (45 1/8)	946 (37-1/4)	870 (34-1/4)	7/8	3/8	152 (6)	98 (3-7/8)	219 (8-5/8)	86 (3-3/8)	508 (20)
4TTR5060E	4	1147 (45 1/8)	946 (37-1/4)	870 (34-1/4)	7/8	3/8	152 (6)	98 (3-7/8)	219 (8-5/8)	86 (3-3/8)	508 (20)
4TTR5061E	4	1147 (45 1/8)	946 (37-1/4)	870 (34-1/4)	1-1/8	3/8	152 (6)	98 (3-7/8)	219 (8-5/8)	86 (3-3/8)	508 (20)

Mechanical Specification Options

General

The 4TTR5 is fully charged from the factory for up to 15 feet of piping. This unit is designed to operate at outdoor ambient temperatures as high as 115°F. Cooling capacities are matched with a wide selection of air handlers and furnace coils that are AHRI certified. The unit is certified to UL 1995. Exterior is designed for outdoor application.

Casing

Unit casing is constructed of heavy gauge, G90 galvanized steel and painted with a weather-resistant powder paint on all louvers, panels, prepaint on all other panels. Corrosion and weather-proof CMBP-G30 DuraTuff™ base.

Refrigerant Controls

Refrigeration system controls include condenser fan and compressor contactor. High and low pressure controls are inherent to the compressor. A factory installed liquid line drier is standard.

Compressor

The Climatuff® compressor features internal over temperature and pressure protection and total dipped hermetic motor. Other features include: roto lock suction and discharge refrigerant connections, centrifugal oil pump and low vibration and noise.

Condenser Coil

The outdoor coil provides low airflow resistance and efficient heat transfer. The coil is protected on all four sides by louvered panels.

Low Ambient Cooling

As manufactured, this unit has a cooling capability to 55°F. The addition of an evaporator defrost control with TXV permits low ambient cooling to 30° F.

Accessories

Thermostats — Cooling only and heat/cooling (manual and automatic change-over). Sub-base to match thermostat and locking thermostat cover.



Trane
www.trane.com

10/10

Trane has a policy of continuous product and product data improvement and it reserves the right to change design and specifications without notice.