



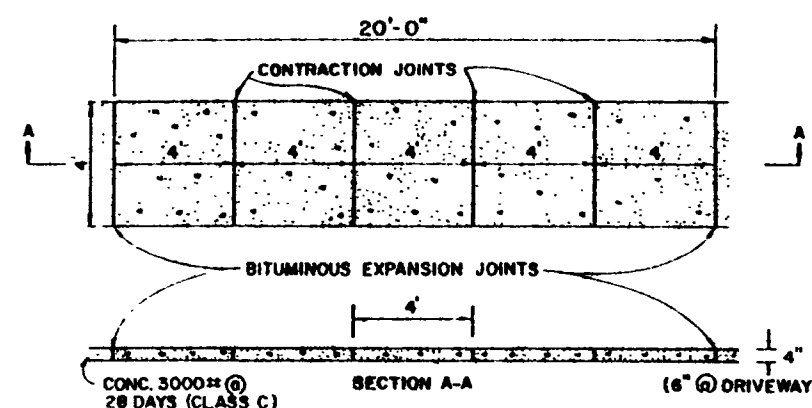


- NOTES:
- 1) A PREFORMED, BITUMINOUS EXPANSION JOINT 1/2" THICK, 4" WIDE, AND EXTENDING THE FULL WIDTH OF THE WALK, UNBROKEN, SHALL BE INSTALLED EVERY 20 FEET. CONTRACTION JOINTS SHALL BE INSTALLED EVERY 4 FEET THE FULL WALK WIDTH.
 - 2) THERE SHALL BE A FLOAT FINISH WITH THE EDGES FINISHED WITH A SUITABLE TOOL.
 - 3) SIDEWALKS ARE TO BE CONSTRUCTED 2 FEET OFF PROPERTY LINE.

SIDEWALK DETAIL

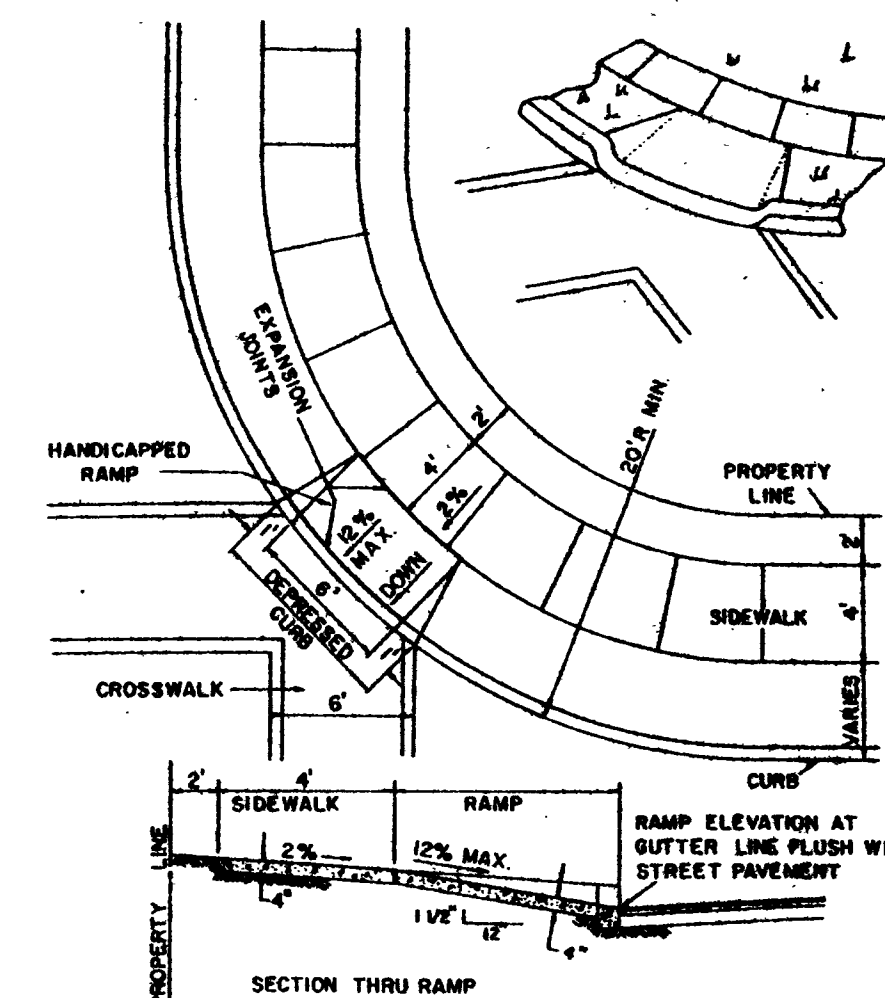

- NOTES:
1. CONCRETE SHALL BE 4500 PSI @ 28 DAYS.
 2. RAMP SHALL BE HAND BROOM FINISHED.
 3. FOR DETAIL OF SIDEWALK CONSTRUCTION SEE ENGINEERING STANDARD R-5.

RAMP AND SIDEWALK DETAIL

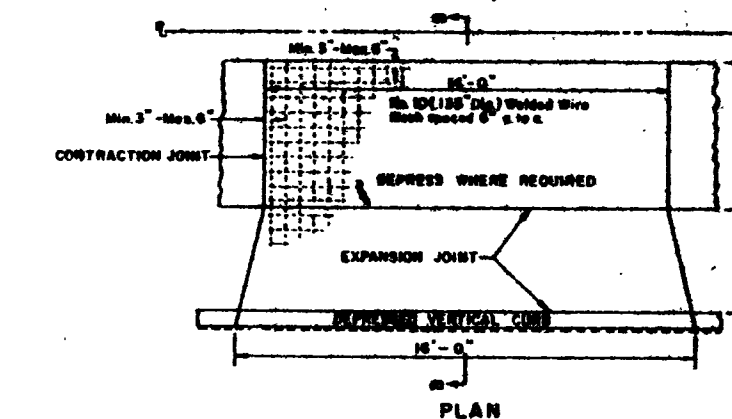


ELEVATION

SECTION B-B

RESIDENTIAL DRIVEWAY APRON AND SIDEWALK DETAIL

LINE CUT EXISTING PUNT. AS SHOWN & PAVE. AS PER DETAIL

FEATHER PROPOSED PAVEMENT ONTO EXISTING PAVEMENT AS NECESSARY TO ENSURE PROPER CROSS SLOPE TRANSITION

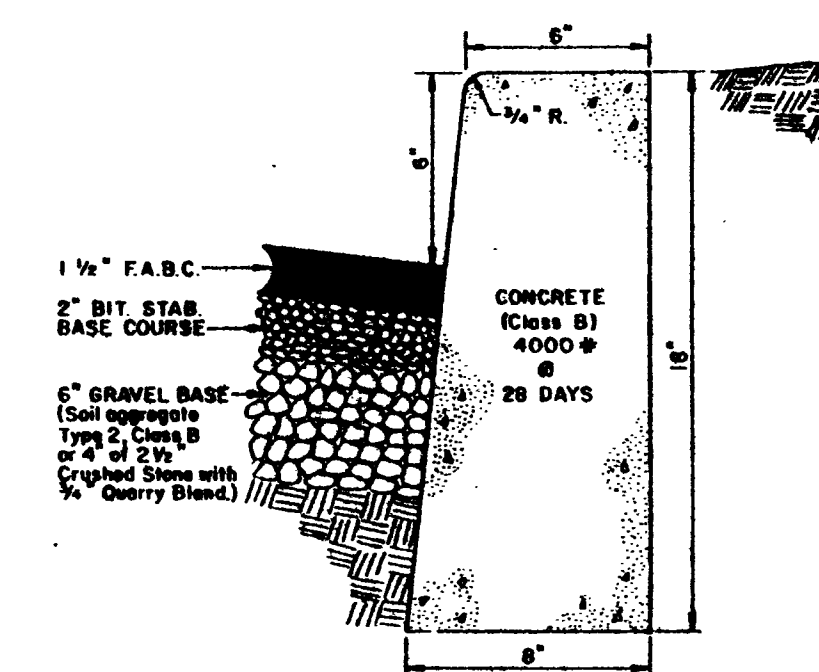


NOTES:

- 1) EXPANSION JOINTS TO BE LOCATED A MAXIMUM OF 30" ON CENTER. EXPANSION MATERIAL TO BE PREMOULDED ASPHALT IMPREGNATED A MINIMUM OF 1/2" THICK. CONTRACTION JOINTS TO BE LOCATED A MAXIMUM OF 10' ON CENTER. ALL JOINTS TO BE FULL DEPTH OF 18".
- 2) DEPRESSIONED VERTICAL CURB AT DRIVEWAY AND RAMP AREAS SHALL BE FULL DEPTH OF 18".

CURB & PAVEMENT DETAIL

APPROVED BY THE BRICK TOWNSHIP PLANNING BOARD
 Nov. 9, 1988
 Chairman: Robert Scherer Date
 Secretary: Joan Kull Date
 Engineer: Robert Chankalian Date

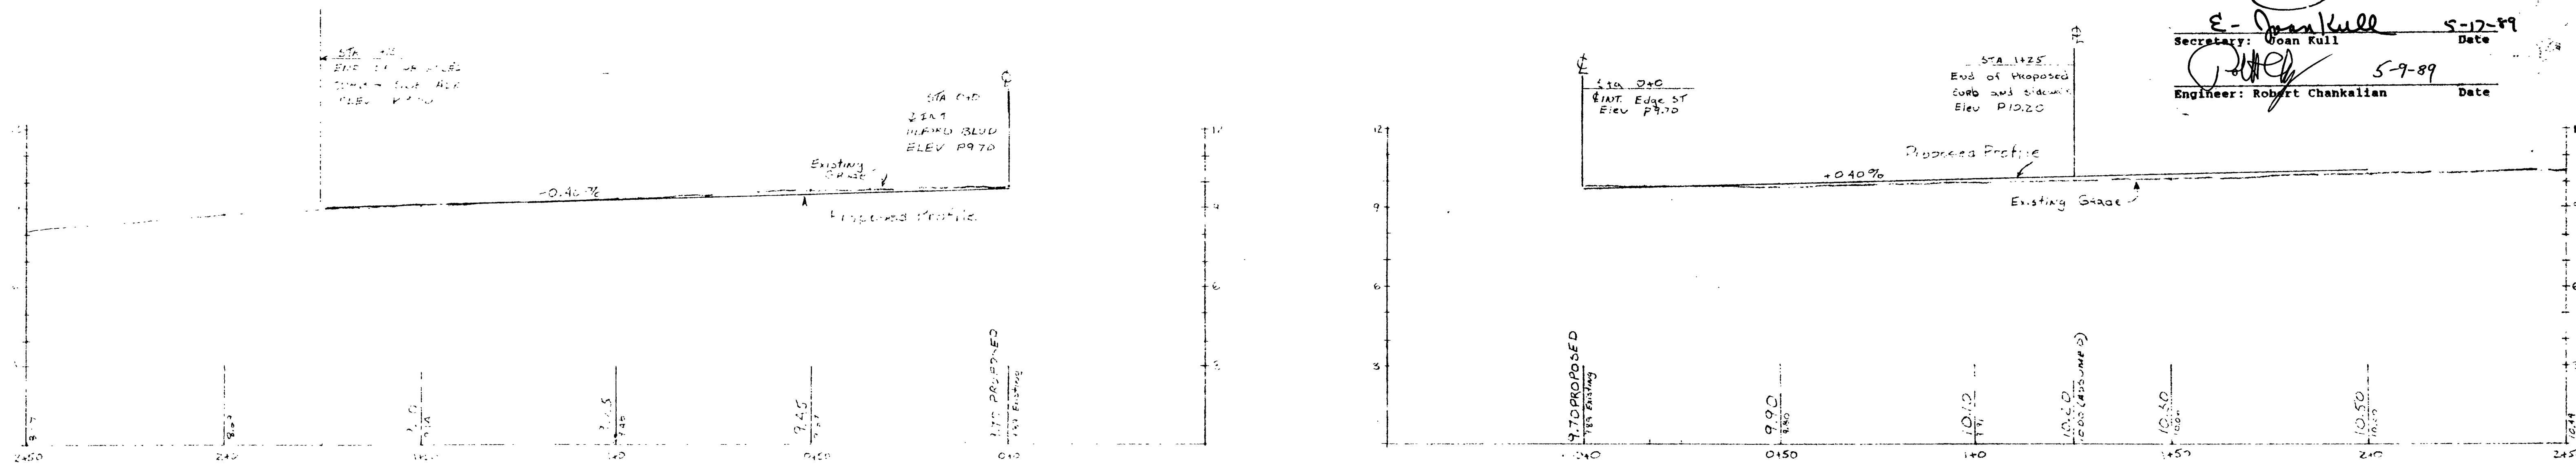

EDGE ST.

scale: 1"=20' HOR.
 1"=3' VERT.

TILFORD BLVD.

scale: 1"=20' HOR.
 1"=3' VERT.

REV 2-14-89

RICHARD S. BUTRYN
 PROFESSIONAL ENGINEER & LAND SURVEYOR N.J. #27445
 2000 R.D. 1, BOX 100, BURKE TAVEN RD.
 R.D. 1, BOX 100, BURKE TAVEN RD.
 805 MANTEL RD., BRICK, N.J. 08723 (201) 477-1255

PLAN & PROFILES

LOTS 31.01 & 31.02 BLOCK 825-15

BRICK TOWNSHIP

OCEAN COUNTY, NEW JERSEY

DATE: 12-23-88